



mcelroy.com

McELROY

INNOVATIVE TOOLS

FOR INNOVATIVE PIPE



SMARTFAB™ 125

SPIDER™ 125
WITH UNIVERSAL
CLAMPING



ACROBAT™ 160



POLYPROPYLENE PIPE
FUSION TOOLS & ACCESSORIES

VERSION 2



CONTENTS

Theory of Fusion	4
The McElroy Advantage	5
McElroy University Training	6

FUSION MACHINES

Socket Fusion Tooling	8
Spider™ 125	10
SmartFab™ 125	12
Acrobat™ 160	15
Acrobat™ 250	18
Rolling and TracStar® 250	21
DynaMc®, Rolling and TracStar® 412	26
Pit Bull®, Rolling and TracStar® 618	32
Pit Bull® 500 Series II and TracStar® 500 Series 3	38
MegaMc® 824	42
TracStar® 630	43

ACCESSORIES

PolyHorse®	46
PolyPorter®	46
Pipe Stands	47
Low Profile Rollers	47
DataLogger® 5	48
DataLogger® Vault™	49

This catalog is furnished under copyright and may be used or copied only in accordance with the terms of such copyright. The content of this catalog is furnished for informational use only, it is subject to change without notice, and should not be construed as a commitment by McElroy Manufacturing, Inc. McElroy Manufacturing, Inc. assumes no responsibility or liability for any errors or inaccuracies that may appear in this book. Photographs of products shown in this book are used for representational purposes only and do not represent actual product usage. Except as permitted by such copyright, no part of this publication may be reproduced, or transmitted, in any form or by any means, electronic, mechanical, recording, or otherwise, without the prior written permission of McElroy Manufacturing, Inc. Please remember that existing artwork or images that you may desire to use may be protected under copyright law, or a registered trademark. The unauthorized incorporation of such artwork or images into your new work could be a violation of the rights of the author. Please be sure to obtain permission required from McElroy Manufacturing, Inc. and all other products or name brands that are trademarks of their respective holders. The following are registered trademarks of McElroy Manufacturing, Inc. All rights reserved: McElroy, MMI, Pit Bull, DataLogger, TracStar, PolyHorse, MegaMc, PolyPorter, DynaMc. The following are trademarks of McElroy Manufacturing, Inc. All rights reserved: Spider, SmartFab, Acrobat, Vault. Other U.S. and foreign patents pending. All fusion equipment and machine specifications are subject to change without notification. Please consult our web site for latest updated information.
www.mcelroy.com

THE LEADER IN THE SCIENCE OF JOINING THERMOPLASTIC PIPE.

The name McElroy is recognized as the most reliable, efficient, rugged and technically advanced pipe fusion equipment in the world. Founded in 1954, McElroy has grown from a two-person start-up to the industry leader in the science of joining thermoplastic pipe.

Through years of manufacturing fusion equipment, we've learned a few things. From the beginning, we made the decision to strive for excellence in customer satisfaction and have settled for nothing less. Over the years, we've improved upon our product offerings based on the input and needs of our customers. It is through that close relationship that we have developed innovative new tools built specifically for the polypropylene fusion market. Designed to be used anywhere in the world, McElroy equipment and tooling are ideal for joining a wide range of polypropylene pipe and fittings.


McElroy's focus on innovation has always spurred growth. We have expanded countless times over the years. Each expansion had one primary aim – gain the physical space needed to bring our inventions to life and better meet our customers' demands. Today, McElroy has combined manufacturing and assembly facilities in excess of 575,000 square feet.

Our investment in state-of-the-art technology and commitment to quality work translates to productivity in the field. Rest assured we stand behind our equipment and our customers. **For Distribution, Service and Support . . . make it a McElroy.**




THE THEORY OF HEAT FUSION

The principle of heat fusion is to heat two surfaces to a designated temperature, and then fuse them together by application of force. This develops pressure which causes flow of the melted materials, which causes mixing and fusion. When the thermoplastic pipe is heated, the molecular structure is transformed from a crystalline state into an amorphous condition. When fusion pressure is applied, the molecules from each pipe end mix.

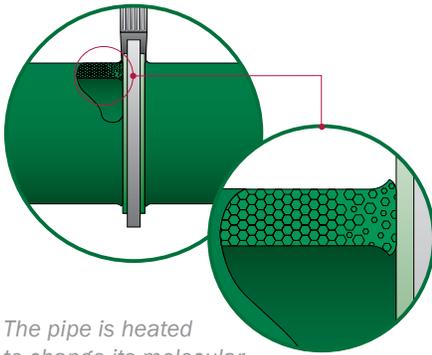

The pipe is heated to change its molecular structure to an amorphous state making it a very pliable material.

As the joint cools, the molecules return to their original form, the original interfaces are gone, and the two pipes have become one monolithic pipe.

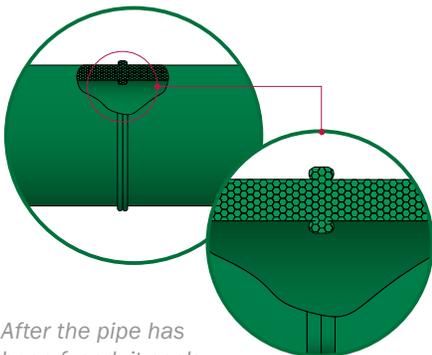

After the pipe has been fused, it cools and returns to its original structure, creating one monolithic pipe.

THE FUSION PROCESS




CLAMPING THE PIPE
The pipe pieces are held axially to allow all subsequent operations to take place.

1

2

FACING THE PIPE
The pipe ends are faced to establish clean, parallel mating surfaces, perpendicular to the centerline of each pipe.

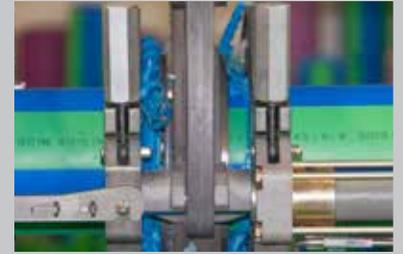

3

HEATING THE PIPE
A melt pattern, that penetrates into the pipe, must be formed around both pipe ends.



4

FUSING THE PIPE
The melt patterns must be joined with a specified force. The force on the joint must be held until the joint cools.



McELROY'S INTERNATIONAL DISTRIBUTOR NETWORK

McElroy products are offered through an international network of sales and authorized service center locations providing our customers around the globe with the tools to succeed.

To find a distributor near you, visit www.mcelroy.com or call us at: 918-831-9229



THE McELROY ADVANTAGE

Founder Art McElroy with the first wheeled fusion machine in 1972.



DURABILITY & PERFORMANCE

Superior Design - McElroy prides itself on building the toughest and longest lasting fusion machines in the world. With proper maintenance, many McElroy machines built in the 1970's are still operating today. They are designed to be used anywhere in the world and at interfacial pressures from 15psi to 150psi (1 BAR to 10 BAR). For

ease of use, McElroy has incorporated many lightweight aluminum components. Critical components such as facers, jaws and inserts are surface hardened so they last for years. Facers have sealed bearings for long life and minimal maintenance. These features combine to provide quality products that have the McElroy Advantage.

QUALITY: JOINT AFTER JOINT

Even Fusion Force - Centerline Guidance is a balanced force system. This patented feature is incorporated in all McElroy butt fusion machines. The centerline of the pipe clamping jaw is on the same plane as the pipe's centerline. The force being

applied during fusion passes through the center of the pipe, giving an equal distribution of force around the diameter of the pipe. This results in an even, continuous bead formation.



TRAINING: ON-SITE, IN-CLASS, OR ONLINE

McElroy understands that a fully trained and qualified crew can help the bottom line on any project. That's why for more than 30 years, McElroy has offered basic and advanced fusion

training on machine operation, machine maintenance and rebuild, as well as customized training at McElroy's facilities, your location, or in the field.

WORLD-CLASS SERVICE & SUPPORT

With McElroy, you get the industry's most reliable fusion equipment and technical support. McElroy has a global distributor network offering our products through

an international network of sales and authorized service center locations. Providing our customers around the globe with the tools to succeed is our

number one priority. We are proud that our network can provide you with local service, training and product support.

INDUSTRY-LEADING WARRANTY

McElroy Manufacturing, Inc. (McElroy) warrants all products manufactured, sold and repaired by it to be free from defects in materials and workmanship, its obligation under this warranty being limited to repairing or replacing at its factory and new products, within 5 years after shipment, with the exception of purchased items (such as electronic devices, pumps, switches, etc.), in which case that manufacturer's warranty applies. Warranty applies when

returned freight is prepaid and which, upon examination, shall disclose to have been defective. This warranty does not apply to any product or component which has been repaired or altered by anyone other than McElroy or has become damaged due to misuse, negligence or casualty, or has not been operated or maintained according to McElroy's printed instructions and warnings. This warranty is expressly in lieu of all other warranties expressed or implied. The

5 YEAR WARRANTY

remedies of the Buyer are the exclusive and sole remedies available and Buyer shall not be entitled to receive any incidental or consequential damages. Buyer waives the benefit of any rule that disclaimer of warranty shall be construed against McElroy and agrees that such disclaimers herein shall be construed liberally in favor of McElroy.



Safety - At McElroy, your safety is our number one priority. All of our equipment, literature and training classes are strictly designed with the operators safety in mind. Never operate machinery until you have read the manual completely, and understand the safety and operation sections of your manual. Your safety and the safety of others depends upon care and judgment in the operation of the equipment. All product manuals and assembly drawings are available for downloading from our website at www.mcelroy.com



McELROY UNIVERSITYSM

McElroy understands that a fully trained and qualified crew can increase the bottom line on any construction project. That's why since 1981, McElroy has offered basic and advanced fusion training designed for efficiency, productivity and safety.

OPERATOR TRAINING AND QUALIFICATION

McElroy University Operations classes help students of all levels to develop and refine fusion skills on McElroy equipment. With an instructional mix of 30% classroom and 70% hands-on, students learn not only the basic mechanics of machine operations but the theory behind it for an overall understanding.

Students take a written/hands-on qualification test. Testing is based on domestic and international qualification standards along with the instruction students receive during operator training. This test serves both as an indicator of their knowledge of industry standards and pipe fusion skill set.



ONLINE RESOURCES

Now you can easily capitalize on the resources and knowledge base of McElroy 75 in the office, in the field — wherever you are — with **McElroy University Online**. At www.McElroy.com/university you can view videos on fusion operations and machine troubleshooting and rebuild on your computer, smartphone or tablet device.

CUSTOM TRAINING

In addition to the standard courses, we offer training customized to fit your unique needs. This training can be conducted at our facility in Tulsa, at your location or on the job site. Instruction is available in multiple languages.


LEARN MORE AND ENROLL TODAY

Multiple classes are offered in various machine sizes. For complete descriptions of each class and a training schedule, visit our website at www.mcelroy.com/university



McCALC[®] FUSION PRESSURE CALCULATOR

Download the McCalc app for your smartphone or tablet device to help you quickly find the correct fusion pressure for your job. Visit www.mcelroy.com/fusion/calculate.htm for more information.

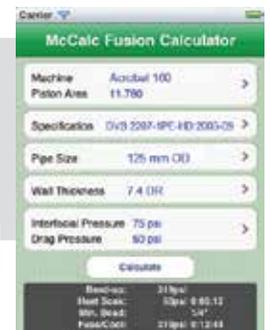

FUSION MACHINES

FOR 16mm TO 630mm POLYPROPYLENE PIPE

MACHINE SELECTION CHART

	16mm (5/8")	20mm (1/2")	25mm (3/4")	32mm (1")	40mm (1 1/4")	50mm (1 1/2")	63mm (2")	75mm (2 1/2")	90mm (3")	110mm (3 1/2")	125mm (4")	160mm (6")	200mm (8")	250mm (10")	315mm (12")	355mm (14")	400mm (16")	450mm (18")	500mm (20")	560mm (22")	630mm (24")	
Socket Kits	█	█	█	█	█	█	█	█	█	█	█											
SmartFab™ 125		█	█	█	█	█	█	█	█	█	█											
Spider™ 125						█	█	█	█	█	█											
Acrobat™ 160						█	█	█	█	█	█	█										
Acrobat™ 250								█	█	█	█	█	█									
Rolling & TracStar® 250										█	█	█	█	█								
DynaMc® 412												█	█	█	█							
Rolling & TracStar® 412													█	█	█	█						
Rolling, TracStar® & Pit Bull® 618													█	█	█	█	█	█				
TracStar® 500 Series 3															█	█	█	█	█	█		
Pit Bull® 500 Series II															█	█	█	█	█	█		
MegaMc® 824																█	█	█	█	█	█	█
TracStar® 630																	█	█	█	█	█	█

* Imperial pipe sizes are nominal diameters

SOCKET FUSION KITS

Fusion Capability For 16mm-125mm (3/8"-4") Polypropylene Pipe

McElroy **Socket Fusion Kits** are perfect for installing fittings for pipe diameters from 16mm to 125mm. These tools are

designed specifically to socket fuse all major brands of polypropylene pipe and fittings. These convenient kits for both

heaters and socket adapters give you the components needed to efficiently complete your socket fusion job.

+ Two heater stands provide three mounting options: Toolbox, bench or freestanding

Custom toolbox + organizes, stores and protects individual tools

+ Durable Teflon-coated socket adapters

Microprocessor-controlled + heater precisely sets and monitors temperature



KITS



20-63mm SOCKET

FUSION KIT Includes 16-63mm Socket Heater, 20-63mm Socket Adapter Kit, Storage Box, Socket Adapter Tray, Heater Sling, Heater Bench Mount, Heater Support Frame, Depth Gauge Tool, 1/4" Allen Driver.

VOLTAGE REQ.	TYPE - D ADAPTERS	TYPE - Q ADAPTERS*
120V	AMR21301	ASW21301
240V	AMR21303	ASW21303



20-125mm SOCKET HEATER ADAPTER KIT

Includes 20-125mm Socket Heater Adapters, Storage Box, Socket Adapter Tray, Depth Gauge Tool, 1/4" Allen Driver.

TYPE - D ADAPTERS	TYPE - Q ADAPTERS*
AMR21701	ASW21701



SMALL HEATER KIT

Includes 16-63mm Socket Heater, Heater Sling, Heater Support Frame, Heater Bench Mount, 1/4" Allen Driver.

VOLTAGE REQ.	PART NUMBER
120V	ASW20201
240V	ASW20202



LARGE HEATER KIT

Includes 16-125mm Socket Heater, Heater Sling, Heater Support Frame, Heater Bench Mount, 1/4" Allen Driver.

VOLTAGE REQ.	PART NUMBER
120V	ASW20301
240V	ASW20302



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

HEATER ADAPTER PACKAGES



KIT SIZE RANGE	TYPE - D ADAPTERS	TYPE - Q * ADAPTERS
20-63mm	AMR21501	ASW21501
63-125mm	AMR21601	ASW21601

INDIVIDUAL HEATER ADAPTER SETS

PIPE SIZE	TYPE - D ADAPTERS	TYPE - Q * ADAPTERS
16mm	MR0050206	MA0050206
20mm	MR0050208	MA0050208
25mm	MR0050210	MA0050210
32mm	MR0050212	MA0050212
40mm	MR0050214	MA0050214
50mm	MR0050216	MA0050216
63mm	MR0050218	MA0050218
75mm	MR0050220	MA0050220
90mm	MR0050222	MA0050222
110mm	MR0050224	MA0050224
125mm	MR0050226	MA0050226

INDIVIDUAL FUSION OUTLET HEAD SETS



SIZE	
40 x 20 x 25mm	MA0050614
50 x 20 x 25mm	MA0050616
63 x 20 x 25mm	MA0050619
63 x 32mm	MA0050620
75 x 20 x 25mm	MA0050623
75 x 32mm	MA0050624
75 x 40mm	MA0050625
90 x 20 x 25mm	MA0050627
90 x 32mm	MA0050628
90 x 40mm	MA0050629
110 x 20 x 25mm	MA0050631
110 x 32mm	MA0050632
110 x 40mm	MA0050634
110 x 50mm	MA0050635
125 x 20 x 25mm	MA0050636
125 x 32mm	MA0050638
125 x 40mm	MA0050640
125 x 50mm	MA0050642
125 x 63mm	MA0050644
160 x 20 x 25mm	MA0050648
160 x 32mm	MA0050650
160 x 40mm	MA0050652
160 x 50mm	MA0050654
160 x 63mm	MA0050656
200 x 20 x 25mm	MA0050660

Additional sizes available upon request.

* Type-Q adapters are for Aquatherm and Aquatechnik pipe ONLY.

ACCESSORIES & REPLACEMENT PARTS FOR SOCKET FUSION

**20-50MM DEPTH GAUGE/
CHAMFER TOOLS & COLD
RING TOOLKIT**
ASW23201



SOCKET STORAGE BOX
Storage box for socket tooling and accessories. Includes universal storage tray. **ASW15905**

**LARGE HEATER
AUXILIARY HANDLE KIT**
Handle assist for large adapters. **SW02807**



DEPTH GAUGE TOOL
Aids in marking appropriate depth for socket fusions.

TYPE - D	TYPE - Q *
SW22302	SW22301

HEATER SUPPORT FRAME
Mount for top of toolbox to hold heater. **238901**



HEATER BENCH-MOUNT ASSEMBLY
Mount to attach heater to tabletop or bench. **239301**



ROTARY PIPE CUTTERS
Easily cut pipe up to 125mm.

10-90mm	MMD00087
63-125mm	MMD00092

RACHET SHEAR
Cuts up to 42mm pipe. **MMD00088**



PYROMETER
Accurately checks surface temperatures of heater. **A218804**

HEATER SLING
Protects heater and helps maintain a constant temperature. **SW08601**



SPIDER™ 125


Fusion Capability For 63mm-125mm (2"-4") Polypropylene Pipe

McElroy's **Spider™ 125** machines are the preferred equipment for quick and accurate socket fusion field installations of 63mm to 125mm polypropylene pipe and fittings. The lightweight, compact device features a worm gear drive with parallel link system to bring

pipe and fittings together evenly and under control. The features of the Spider 125 allow a single technician to properly align, heat, fuse and cool the pipe. Because the Spider is non-back drivable, constant pressure is maintained throughout the process.

The Spider 125 is available in two models: **with Universal Clamping** - which can accommodate any size of pipe or coupling from 63mm to 125mm or with **Chain Clamping** for Aquatherm and Aquatechnik pipe only.

FUSION MACHINES

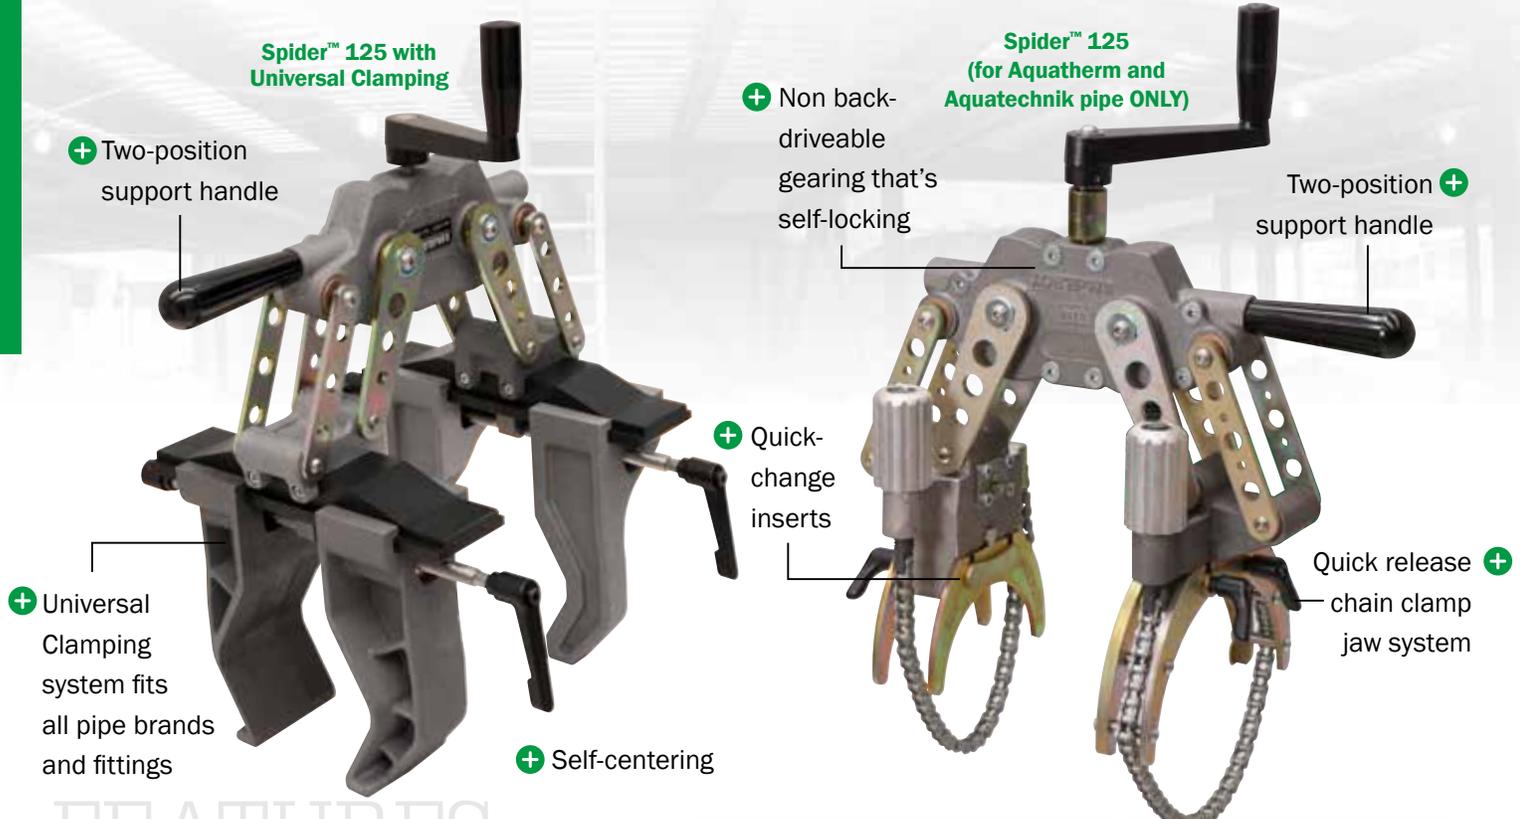

FEATURES

Models **A456501 UNIVERSAL CLAMP** **A446501 CHAIN CLAMP ***



COMPACT & LIGHT

Both models of the Spider 125 are lightweight making them exceptional tools for performing socket fusions in overhead, vertical and tight-space situations.



NON-BACK-DRIVEABLE

The Spider 125 features a worm gear drive with parallel link system to bring pipe and fittings together evenly while maintaining constant pressure on the fusion joint throughout the process.



FITS ANY PIPE OR FITTING

The Spider 125 with Universal Clamping features a clamping system that can accommodate any size of pipe or fitting from 63 to 125mm—eliminating the need for inserts.



QUICK-CHANGE INSERTS

The Spider 125 with chain clamping includes inserts for Aquatherm or Aquatechnik pipe and fittings which can be easily changed with quick-release thumb screws.



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

SPIDER™ 125 SPECIFICATIONS

Spider 125 with Universal Clamping package includes fusion machine, stainless carrying case and soft-sided carrying case.

Spider 125 package includes fusion machine, toolbox, soft-sided carrying case, stand and 63mm-125mm inserts. Specifications are subject to change without notice.

MODELS

Spider 125 with Universal Clamping **A456501**

Spider 125 with chain clamping **A446501**


(chain clamping for Aquatherm and Aquatechnik pipe ONLY)

	Spider 125 with Universal Clamping	Spider 125 with chain clamping
Capacity	63mm-125mm	63mm-125mm
Weight	15 lbs. (6.8 Kg)	13 lbs. (5.9 Kg)
Maximum Stroke	7.6" (193mm)	7.6" (193mm)
Mechanical Advantage	20-to-1	20-to-1


DIMENSIONS

	Spider 125 with Universal Clamping	Spider 125 with chain clamping
Length (Open)	15" (381mm)	14.75" (375mm)
Length (Closed)	12" (305mm)	12" (305mm)
Width	14" (356mm)	8.13" (207mm)
Height	19.5" (495mm)	18.27" (465mm)

SPIDER 125 WITH UNIVERSAL CLAMPING

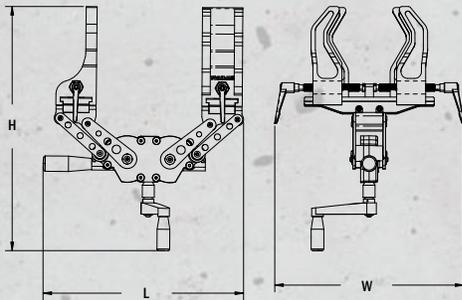

SPIDER 125

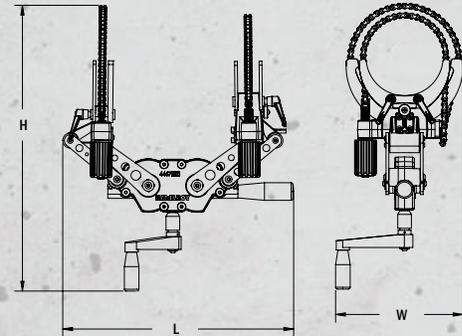

REPLACEMENT INSERTS FOR CHAIN CLAMP MODEL ONLY



125mm Coupling w/stops	448001	110mm Narrow	448401	75mm Pipe Countersunk	448901
125mm Coupling	448003	90mm Coupling w/stops	448501	75mm Pipe	448903
125mm Pipe Countersunk	448101	90mm Coupling	448503	75mm Narrow	449001
125mm Pipe	448103	90mm Pipe Countersunk	448601	63mm Coupling w/stops	449101
110mm Coupling w/stops	448201	90mm Pipe	448603	63mm Coupling	449103
110mm Coupling	448203	90mm Narrow	448701	63mm Pipe	449203
110mm Pipe Countersunk	448301	75mm Coupling w/stops	448801	63mm Narrow	449301
110mm Pipe	448303	75mm Coupling	448803		

ACCESSORIES & REPLACEMENT PARTS FOR SPIDER™ 125 MACHINES

HEATER SLING

Protects heater and helps maintain a constant temperature.

SW08601



FLANGE SPACER KIT

For chain clamp Spider 125 when clamping onto Aquatherm and Aquatechnik flange fittings. **A452401**

63mm	452401
75mm	452402
90mm	452403
110mm	452404
125mm	452603



LARGE HEATER AUXILIARY HANDLE KIT

Handle assist for large adapters. **SW02807**



DEPTH GAUGE TOOL

Aids in marking appropriate depth for socket fusions.

TYPE - D	TYPE - Q*
SW22302	SW22301

HEATER SUPPORT FRAME

Mount for top of toolbox to hold heater. **238901**



HEATER BENCH-MOUNT ASSEMBLY

Mount to attach heater to tabletop or bench. **239301**

RACHET SHEAR

Cut up to 42mm pipe. **MMD00088**



ROTARY PIPE CUTTERS

Easily cut pipe up to 125mm.

10-90mm	MMD00087
63-125mm	MMD00092



CARRYING CASE Protect, store and transport Spider 125 and accessories.

SOFT-SIDED **MJQ00543**

STAINLESS **456701**
(Universal Clamping only)

* Type-Q adapters are for Aquatherm and Aquatechnik pipe ONLY.

SMARTFAB™ 125

Fusion Capability For 20mm-125mm (1/2"-4") Polypropylene Pipe

McElroy has created a smarter way to socket fuse pipe and fittings for polypropylene piping systems with the **SmartFab™ 125** benchtop machine. Its portable design allows it to be positioned on any flat surface for precise prefabrication,

providing versatility in the shop as well as the field.

Advanced features of the SmartFab 125 provide more efficiency with innovative inserts that reduce ovality in pipe and fittings. The heater pivots to easily

accommodate fittings situated on either side of the machine, which eliminates having to reposition the entire machine. Its four jaws adjust to any desired spacing and each jaw clamps individually to the desired pipe and fitting size.

FUSION MACHINES

+ Jaws clamp individually and are size independent, allowing a greater combination of pipe and fittings

+ Heater pivots 180° so the machine, pipe and fitting never has to be repositioned


+ Innovative inserts that reduce ovality in pipe and fittings

+ Uses standard McElroy heater adapters

+ Drive handle positioned so that unit can operate on any flat surface.

+ Outer jaw spacing is adjustable – allowing greater flexibility, support and alignment while fusing fittings and assemblies

+ Positive stop at full stab depth to fabricate at exact dimensions

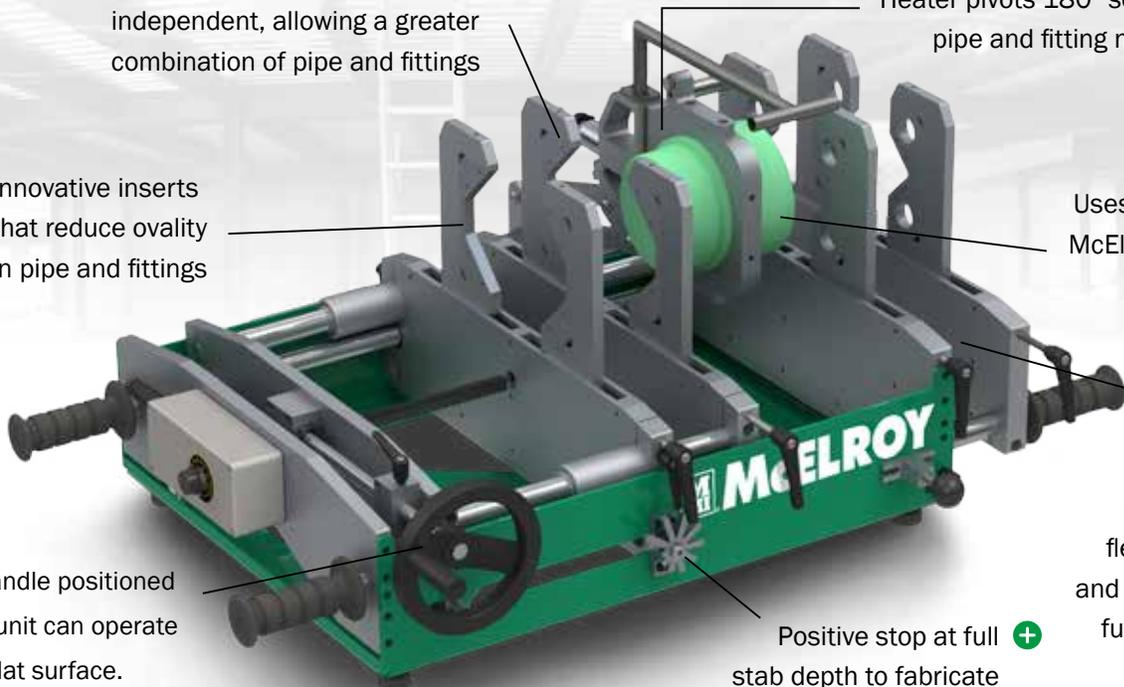

FEATURES

Models **A458701** (120V, TYPE-Q*) **A458702** (120V, TYPE-D) **A458703** (240V, TYPE-Q*) **A458704** (240V, TYPE-D)



INNOVATIVE INSERTS

The SmartFab 125's unique insert design snaps into place easily and reduces ovality in pipe and fittings.



PIVOTING HEATER

The SmartFab 125 heater rotates 180° to eliminate repositioning of the pipe, fitting or machine.



INDIVIDUALLY CLAMPING JAWS

The SmartFab 125 jaws clamp individually and are size independent, allowing for a greater combination of pipe and fittings.



USES MCELROY HEATER ADAPTERS

The SmartFab 125 utilizes the entire range of anti-stick, Teflon-coated heater adapters.




INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

* Type-Q adapters are for Aquatherm and Aquatechnik pipe ONLY.

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for pipe ranges below.

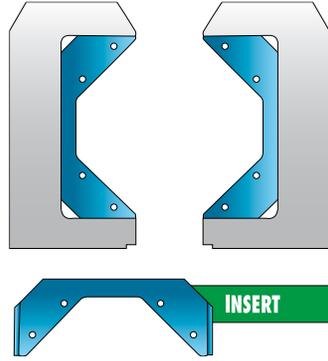

COMPLETE INSERT SET

INSERT SIZE PIPE OD	PIPE OD	PART NO.
170mm - 17mm	6.7" - .66"	458405

INDIVIDUAL INSERTS

INSERT SIZE PIPE OD	PIPE OD	PART NO.
170mm - 95mm	6.7" - 3.75"	458401*
95mm - 50mm	3.75" - 1.5"	458402*
50mm - 28mm	1.5" - 1.1"	458403*
28mm - 17mm	1.1" - .66"	458404*

All inserts below snap into machine jaws

SET = 8 INSERTS

* Included with machine package

SMARTFAB™ 125 SPECIFICATIONS

SmartFab 125 package includes fusion machine, 20-125mm heater adapters, adapter storage box and shipping container. Specifications are subject to change without notice.



MODELS	HEATER ADAPTERS	
120V Model	A458701	Type-Q*
	A458702	Type-D
240V Model	A458703	Type-Q*
	A458704	Type-D

*Type-Q adapters are for Aquatherm and Aquatechnik pipe ONLY.

WEIGHT

Machine 145 lbs (65.8 Kg)

DIMENSIONS

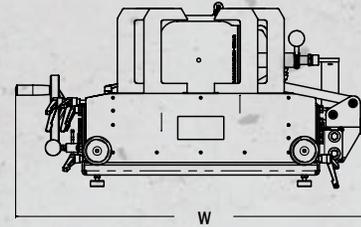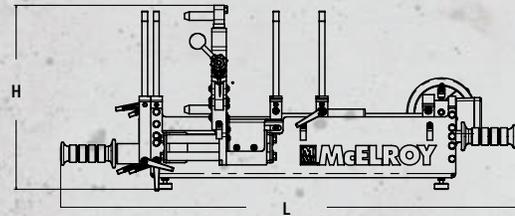

	Heater Retracted	Heater Extended
Width	30.8" (782.3mm)	38" (965.2mm)
Length	40.1" (1019.2mm)	40.1" (1019.2mm)
Height	16" (406mm)	20.5" (520.7mm)

ACCESSORIES & REPLACEMENT PARTS FOR **SMARTFAB™** 125 MACHINES

HEATER ADAPTERS



PIPE SIZE	TYPE-D ADAPTERS PART NO.	TYPE-Q ADAPTERS PART NO. *
20mm	MR0050208	MA0050208
25mm	MR0050210	MA0050210
32mm	MR0050212	MA0050212
40mm	MR0050214	MA0050214
50mm	MR0050216	MA0050216
63mm	MR0050218	MA0050218
75mm	MR0050220	MA0050220
90mm	MR0050222	MA0050222
110mm	MR0050224	MA0050224
125mm	MR0050226	MA0050226

* Type-Q adapters are for Aquatherm and Aquatechnik pipe ONLY.



SOCKET STORAGE BOX
Storage box for heater adapters and inserts.
ASW15905

HEATER SLING

Protects heater and helps maintain a constant temperature.
SW08601



SHIPPING CONTAINER

Protects and transports machine, and storage box
SED00125



63-125MM ROTARY PIPE CUTTER
Easily cut pipe from 63-125mm. **MMD00092**



DEPTH GAUGE TOOL

Aids in marking appropriate depth for socket fusions.

TYPE - D	TYPE - Q *
SW22302	SW22301



PYROMETER

Accurately checks surface temperatures of heater. **A218804**

POLYPORTER®

Designed to aid in lifting of the pipe as well as perform as a pipe stand.
864201



PIPE SUPPORT STAND
812501

Visit www.mcelroy.com to view more fusion machines, accessories, and productivity tools.

ACROBAT™ 160

Fusion Capability For 63mm-160mm (2"-6") Polypropylene Pipe


The **Acrobat™ 160** is a low-force fusion machine that allows operators to butt fuse pipe in tight work spaces. With its small footprint and optimal weight, it is an easy machine to manipulate when performing overhead fusions in tight

spaces as well on the ground.

For even tighter spaces, the Acrobat 160 can be configured from 4 jaws to 3 jaws without using tools. It also comes with a Hydraulic Power Unit (HPU) and inserts for commonly butt-fused polypropylene

pipe sizes. The facer and heater can be loaded from the top or bottom (in the 3-jaw configuration) of the carriage giving the operator better access and flexibility regardless of the joining challenge.

FUSION MACHINES

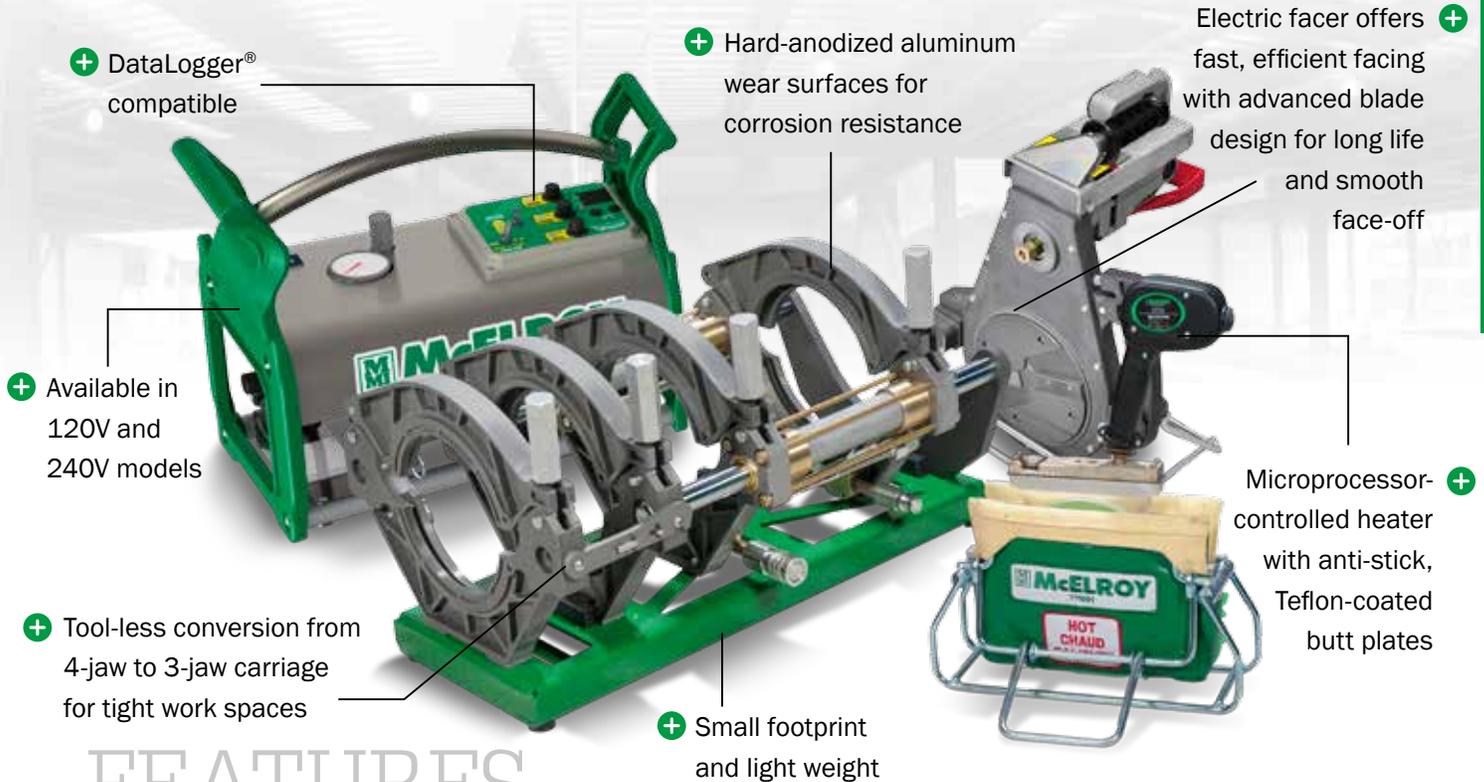

+ DataLogger® compatible

+ Hard-anodized aluminum wear surfaces for corrosion resistance

+ Electric facer offers fast, efficient facing with advanced blade design for long life and smooth face-off

+ Available in 120V and 240V models

+ Microprocessor-controlled heater with anti-stick, Teflon-coated butt plates

+ Tool-less conversion from 4-jaw to 3-jaw carriage for tight work spaces

+ Small footprint and light weight

FEATURES

Packages **A714501** 120V **A714502** 220-240V **A714501P** 120V (W/PREMIUM CASE) **A714502P** 220-240V (W/PREMIUM CASE)



CONFIGURABLE TO 3-JAW CARRIAGE

The Acrobat carriage can easily be converted to a smaller 3-jaw configuration by removing it from the base – without the use of tools.



FLEXIBLE TO MEET THE JOB DEMANDS

Thanks to the Acrobat's narrow jaw construction and compact package, flange-to-pipe, fitting-to-pipe and even fitting-to-fitting fusions can be done with ease.



LIGHTWEIGHT

Initially weighing just 40 pounds in the 4-jaw configuration, the Acrobat lightens the load to a mere 29 pounds in its 3-jaw configuration – making overhead fusions a breeze.



AVAILABLE IN A PRODUCTIVITY PACKAGE

For the contractor that wants to save time and money, includes a Manual Machine Stand and two PolyPorters®.


120V	A714201
240V	A714202



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only.

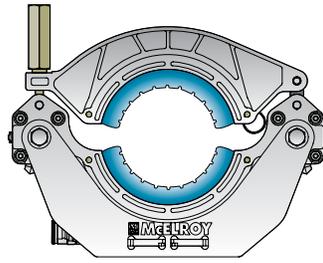

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.



BUTT FUSION INSERTS

INSERT SIZE PIPE OD	PIPE OD	PART NO.
<i>All inserts below fit in 160mm jaws</i>		
125mm	4"	716802 *
110mm	3.5"	716804
90mm	3"	716808
75mm	2.5"	716810
63mm	2"	716812

SET = 8 INSERTS

* Included with machine package

ACROBAT™ 160 SPECIFICATIONS

Acrobat 160 package includes fusion machine, facer, heater, insulated heater stand, facer stand, Acrobat HPU (Hydraulic Power Unit), 125mm inserts and shipping container. Specifications are subject to change without notice.

MODELS

120V Model	A714501
240V Model	A714502
120V Model	A714501P (With Premium Shipping Case)
240V Model	A714502P (With Premium Shipping Case)

POWER

	120V Model	240V Model
Input Voltage Req.	120V, 60Hz, 1 Ph	220-240V, 50/60Hz, 1 Ph
Heater	1.2 kW	1.2 kW
Facer	.9 kVA / .7 kW	1.2 kVA / 1 kW
HPU	3 HP, 4.2 Amp	.3 HP, 2.1 Amp
Plug Type	Nema 5-15P	CEE 7/7




WEIGHT

4-Jaw Carriage	40 lbs (18.1 Kg)
3-Jaw Carriage	29 lbs (13.2 Kg)
Facer	35 lbs (15.9 Kg)
Heater	14 lbs (6.4 Kg)
HPU	56 lbs (25.4 Kg)
Shipping Container	350 lbs (158.8 Kg)

HYDRAULICS

Max Gauge Pressure 400 PSI (27.6 BAR)

DIMENSIONS

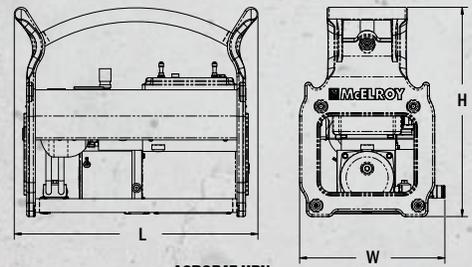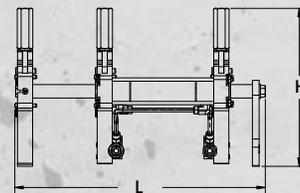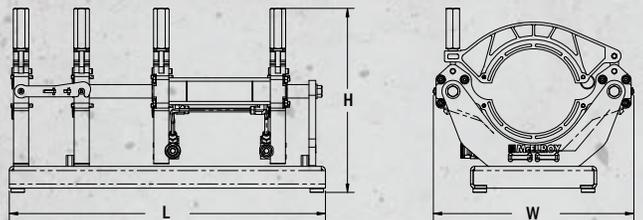

ACROBAT HPU

	4-Jaw Carriage	3-Jaw Carriage	HPU
Width	15" (381mm)	15" (381mm)	13.2" (335mm)
Length	23.5" (597mm)	19" (483mm)	22.1" (562mm)
Height	14" (356mm)	12" (305mm)	19" (482.6mm)

ACCESSORIES & REPLACEMENT PARTS FOR **ACROBAT™ 160** MACHINES

FACER Powered blades keep the pipe edges clean and aligned.

100-120V **709602**
220-240V **711602**



FACER BLADE SET
Includes 4 blades, screws and wrench. **710604**

FACER STAND

Facer stand provides a convenient place to protect and store your facer. **711801**



PREMIUM SHIPPING CONTAINER

Protects and transports machine, HPU, heater and facer. **714001**



DATALOGGER® 5

Record and document fusion process parameters and details.

ENGLISH **DL16001**


SPANISH **DL16002**

See website for more languages



63-125MM ROTARY PIPE CUTTER

Easily cut pipe from 63-125mm. **MMD00092**

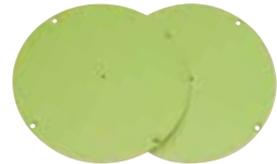

HEATER PLATE KIT

Plates have an anti-stick coating and are required for butt fusion. Kit includes 2 plates and screws. **A707901**

HEATER STAND

Holds heater for easier carrying and protection. Heater bag helps to maintain a constant temperature. **712001**



HEATER
Microprocessor-controlled with dial thermometer.

100-120V **707701**
220-240V **707601**



POLYPORTER®

Designed to aid in lifting of the pipe as well as perform as a pipe stand. **864201**



PYROMETER

Accurately checks surface temperatures of heater. **A218804**



LOW PROFILE ROLLERS

Aids by reducing drag and protecting the pipe from damage. (Requires 2 rollers.)

CASE OF 40 **A1867501**
SINGLE ROLLER **1867501**

MANUAL MACHINE STAND

Expands to a comfortable operation height and folds for easy transport and storage. **439001**



PIPE SUPPORT STAND

For use with Manual Machine Stand. **812501**

Visit www.mcelroy.com to view more fusion machines, accessories, and productivity tools.

ACROBAT™ 250

Fusion Capability For 63mm-250mm (2"-10") Polypropylene Pipe

The Acrobat™ 250 has a compact design for easy maneuvering in tight indoor work spaces specific to the polypropylene industry. To further reduce its footprint, the carriage can be configured from 4 to 3 jaws without tools. A single-size insert

design can accommodate a variety of pipe sizes, and its narrow jaws allow fusions to most flanges and fittings.

The Acrobat 250 comes with a new lightweight heater and guide rod latching system which eliminates holding the heater

in place manually during overhead fusions. Its ergonomic handlebar design makes it easy to use in different orientations, including overhead. The HPU (Hydraulic Power Unit) consumes less power and is lightweight, making it easier to move between jobsites.

FUSION MACHINES

+ Lightweight power unit available in 120V and 240V models

+ Hard anodized aluminum wear surfaces for corrosion resistance

Electric facer offers fast, efficient facing with advanced blade design for long life and smooth face-off

+ DataLogger® compatible

+ Configures from 4-to 3-jaws without tools for tight work spaces

+ Microprocessor-controlled heater with anti-stick, Teflon-coated butt plates

+ Compact and lightweight for easy maneuvering

FEATURES

Packages **A2500101** 120V

A2500102 240V

A2500101P 120V (W/PREMIUM CASE)

A2500102P 240V (W/PREMIUM CASE)



CONFIGURABLE TO 3-JAW CARRIAGE

The Acrobat carriage can easily be converted to a smaller 3-jaw configuration by removing it from the base - without the use of tools.



FLEXIBLE TO MEET THE JOB DEMANDS

Thanks to the Acrobat's narrow jaw construction and compact package, flange-to-pipe, fitting-to-pipe and even fitting-to-fitting fusions can be done with ease.



LIGHTWEIGHT

Initially weighing just 53 pounds in the 4-jaw configuration, the Acrobat lightens the load to a mere 38 pounds in its 3-jaw configuration - making overhead fusions a breeze.



HYDRAULIC-POWERED

Efficient power unit provides power to fuse all day while maintaining pressures up to 400PSI.




INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only.

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.

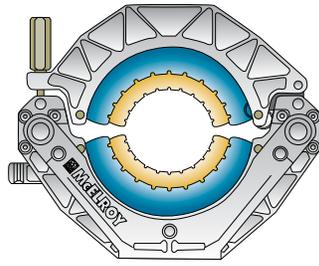

BUTT FUSION INSERTS

INSERT SIZE PIPE OD	PIPE OD	PART NO.
<i>All inserts below fit in 250mm jaws</i>		
8" DIPS	9.05" (230mm)	2503816
8" IPS	8.63" (219mm)	2503817
200mm	8"	2503813 *
6" DIPS	6.90" (175mm)	2503814
6" IPS	6.63" (168mm)	2503815
160mm Master	6"	2503812 *

* Included with machine package

All inserts below require 160mm Masters

125mm	4"	716802
110mm	3.5"	716804
90mm	3"	716808
75mm	2.5"	716810
63mm	2"	716812

SET = 8 INSERTS

ACROBAT™ 250 SPECIFICATIONS

Acrobat 250 package includes fusion machine, facer, heater, insulated heater basket, facer stand, Acrobat HPU, inserts and shipping container. Specifications are subject to change without notice.

MODELS

120V Model	A2500101
240V Model	A2500102
120V Model	A2500101P (With Premium Shipping Case)
240V Model	A2500102P (With Premium Shipping Case)

POWER

	120V Model	240V Model
Input Voltage Req.	120V, 50/60Hz, 1 Ph	220-240V, 50/60Hz, 1 Ph
Heater	1.75kW	3 kW
Facer	10 Amp	5 Amp
HPU	.3 HP, 4.2 Amp	.3 HP, 2.1 Amp
Plug Type	Nema 5-15P	CEE 7/7



WEIGHT

4-Jaw Carriage	53.6 lbs (24.3 Kg)
3-Jaw Carriage	38.1 lbs (17.3 Kg)
Facer	39.8 lbs (18.1 Kg)
Heater	20 lbs (9.1 Kg)
HPU	56 lbs (25.4 Kg)

HYDRAULICS

Max Gauge Pressure	600 PSI (41.4 BAR)
---------------------------	--------------------

DIMENSIONS

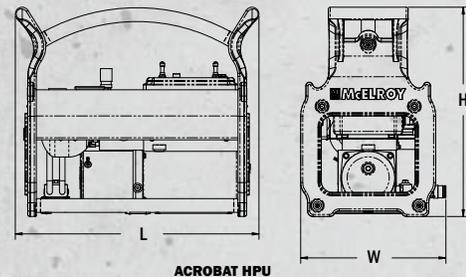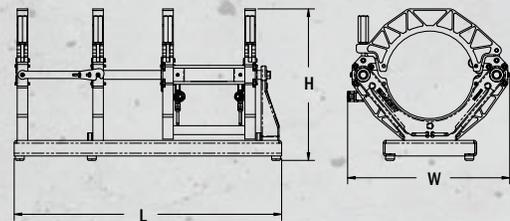

	4-Jaw Carriage	3-Jaw Carriage	HPU
Width	18.25" (464mm)	18" (457mm)	13.2" (335mm)
Length	30.1" (765mm)	21.1" (536mm)	22.1" (562mm)
Height	17" (432mm)	14.75" (375mm)	19" (482.6mm)

ACCESSORIES & REPLACEMENT PARTS FOR **ACROBAT™ 250** MACHINES



FACER Powered blades keep the pipe edges clean and aligned.

100-120V	900801
220-240V	900901

FACER BLADE SET
Includes 4 blades, screws and wrench. **710606**



FACER STAND
Facer stand provides a convenient place to protect and store your facer. **T801101**



PREMIUM SHIPPING CONTAINER
Protects and transports machine, HPU, heater and facer. **2511001**

DATALOGGER® 5
Record and document fusion process parameters and details.

ENGLISH
DL16001

SPANISH
DL16002

See website for more languages




63-125MM ROTARY PIPE CUTTER
Easily cut pipe from 63-125mm. **MMD00092**



HEATER PLATE KIT
Plates have an anti-stick coating and are required for butt fusion. Kit includes 2 plates and screws. **A2504901**

HEATER STAND
Holds heater for easier carrying and protection. Heater bag helps to maintain a constant temperature. **2501001**

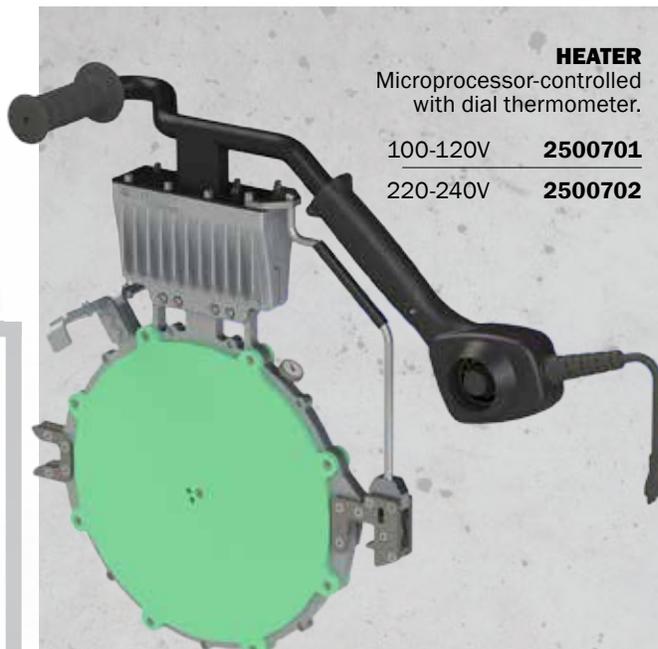

HEATER
Microprocessor-controlled with dial thermometer.

100-120V **2500701**

220-240V **2500702**

POLYPORTER®
Designed to aid in lifting of the pipe as well as perform as a pipe stand. **864201**



PYROMETER
Accurately checks surface temperatures of heater. **A218804**



LOW PROFILE ROLLERS Aids by reducing drag and protecting the pipe from damage. (Requires 2 rollers.)

CASE OF 40 **A1867501**

SINGLE ROLLER **1867501**

MANUAL MACHINE STAND
Expands to a comfortable operation height and folds for easy transport and storage. **439001**



PIPE SUPPORT STAND
For use with Manual Machine Stand. **812501**

Visit www.mcelroy.com to view more fusion machines, accessories, and productivity tools.

ROLLING 250


Butt Fusion Capability For 125mm-250mm (4"-10") Polypropylene Pipe

The **Rolling 250** model's ease of use, and rugged quality construction have become the standard.

The Rolling 250 incorporates a universal 4-jaw carriage that can be easily removed for

fusion operations remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting to a 3-jaw carriage for close access in tight installations.

For polypropylene fusions, the Rolling 250 features a powerful hydraulic facer for fast and efficient facing of pipe ends.

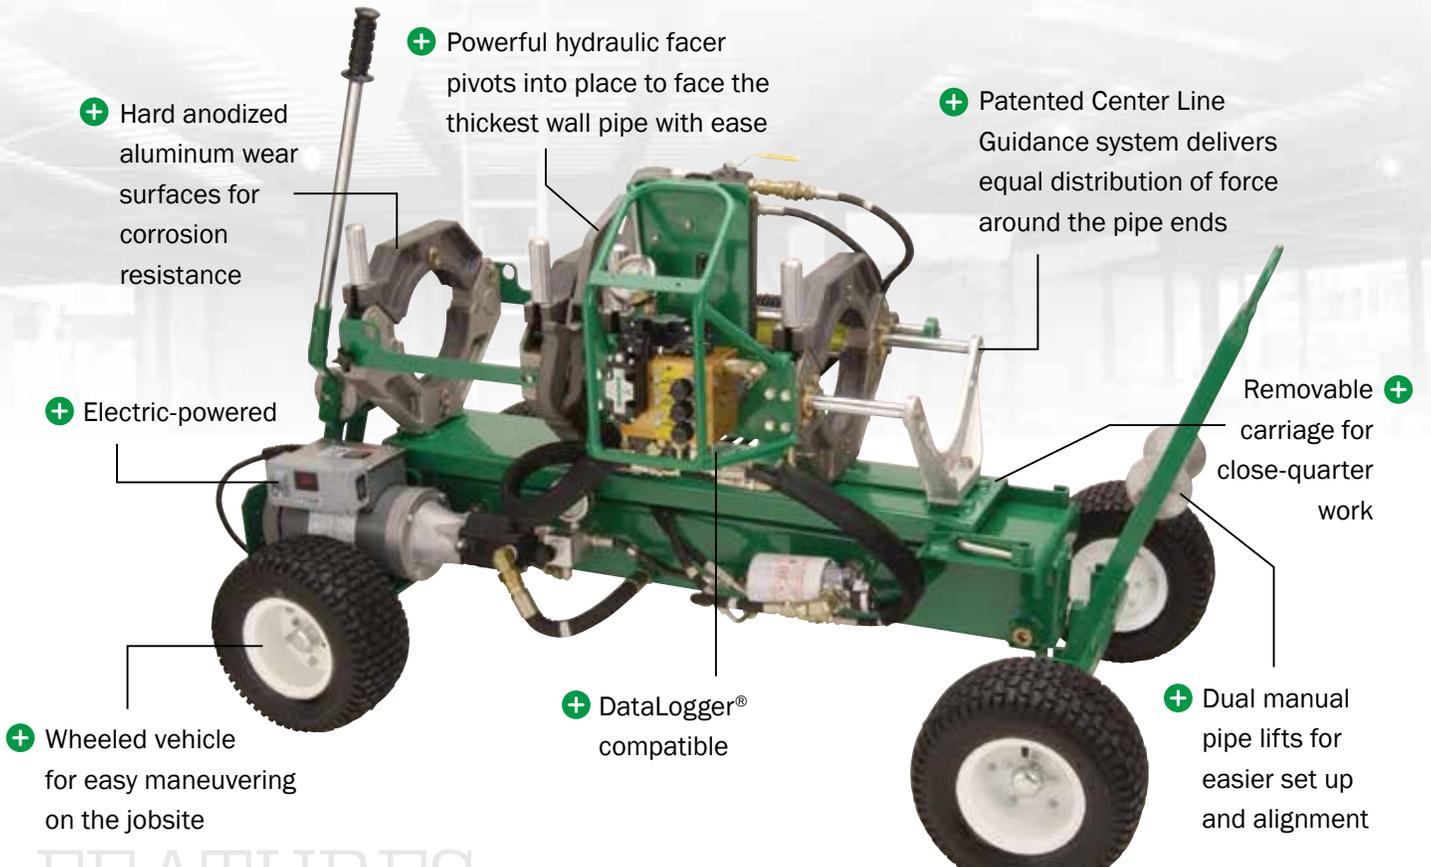

FUSION MACHINES

FEATURES

Models **A866005** 120V **A866003** 220-240V



REMOVABLE CARRIAGE

The 250 carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



SERRATED JAWS FOR MAXIMUM GRIP

All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



HYDRAULIC FACER

Indexer-mounted hydraulic facer pivots into place to face the thickest wall pipe with ease.



DATALOGGER® COMPATIBLE

Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

SUPER TRACSTAR® 250

Butt Fusion Capability For 125mm-250mm (4"-10") Polypropylene Pipe

The **Super TracStar® 250** is a self-contained, self-propelled, track-mounted vehicle. Designed to offer the utmost maneuverability and flexibility on a jobsite, the robust features include a strong hydraulic facer for fast and efficient facing

of pipe ends. The on-board engine and generator powers both the hydraulics and heater.

The Super TracStar 250 incorporates an interchangeable 4-jaw carriage that can be easily removed for polypropylene

fusion operations remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting it to a 3-jaw carriage for an even more compact fusion unit.

FUSION MACHINES



+ Powerful hydraulic facer pivots into place to face the thickest wall pipe with ease

+ Serrated hard-anodized jaws and inserts for maximum grip on pipe

+ Dual manual pipe lifts for easier set up and alignment

Self-contained power eliminates the need for a separate generator

Removable carriage for close-quarter work

DataLogger compatible

FEATURES

Model **AT2500108**



SELF-CONTAINED

The McElroy TracStar line has self-contained power — eliminating the need for a separate generator.



SELF-PROPELLED

TracStar machines are mounted on all terrain rubber tracks and easily maneuverable on any jobsite with independent controls for each track.



REMOVABLE CARRIAGE

The TracStar carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



DATALOGGER®

COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**




INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only. Not all inserts fit directly in the jaws. Some inserts nest inside other inserts, called master inserts.

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.

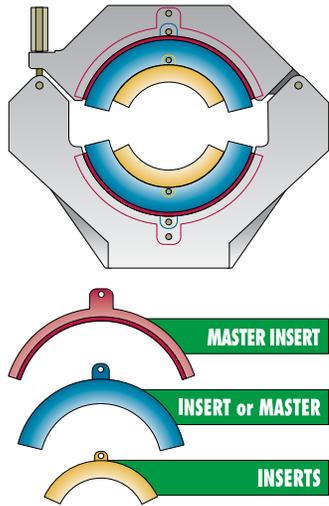

BUTT FUSION INSERTS

INSERT SIZE	PIPE OD	2-JAW SET	4-JAW SET
<i>All inserts below fit in 250mm (9.84") jaws</i>			
8"IPS/250mm Master	219mm (8.63")	T2503516	T2503504 *

All inserts below fit in 8" IPS/DIPS or 8"IPS/250mm Masters

200mm	200mm (7.87")	801548	801511
160mm	160mm (6.30")	8078148	807813

All inserts below require 6"IPS & 8"IPS/DIPS or 6"IPS & 8"IPS/250mm Masters


125mm	125mm (4.92")	809438	809413
-------	---------------	---------------	---------------

2-JAW SET = 4 INSERTS, 4-JAW SET = 8 INSERTS

* Included with machine package

11.25" MITERED INSERTS

Mitered inserts are used to fabricate segmented ells. Our standard miter is 11¼°, other mitered angles are available upon request.



INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 250mm (9.84") jaws</i>		
200mm/250mm x 11.25"	200mm (7.87")	T2503513
8"IPS/250mm Master	219mm (8.63")	T2503504

All inserts below fit in 8" IPS/DIPS or 8"IPS/250mm Masters

160mm x 11.25"	160mm (6.30")	807817
125mm x 11.25"	125mm (4.92")	807896

SET = 4 INSERTS AND 1 TEMPLATE

ROLLING 250 SPECIFICATIONS

Rolling 250 machine package includes fusion machine, facer, heater, insulated heater stand and 8" IPS/250mm master inserts. Specifications subject to change without notice.

MODELS

120V Rolling 250	A866005
220-240V Rolling 250	A866003

POWER

Input Voltage Requirements	120V, 60Hz, 1 Ph 220-240V, 50/60Hz, 1 Ph
Heater	3000 Watt
Facer	Hydraulic
Electric Motor	1.5 HP

WEIGHT

Machine	575 lbs (260.8 Kg)
4-Jaw Carriage	201 lbs (91.2 Kg)
3-Jaw Carriage	122 lbs (55.3 Kg)
Facer	44 lbs (20 Kg)
Heater	27 lbs (12.2 Kg)


HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)
Reservoir Capacity	5 Gallons (18.92 Liters)

CHASSIS & MOBILITY

Frame	Welded steel construction
Tires	High-flotation inflatable
Transportation	Pulled via tow ring

DIMENSIONS

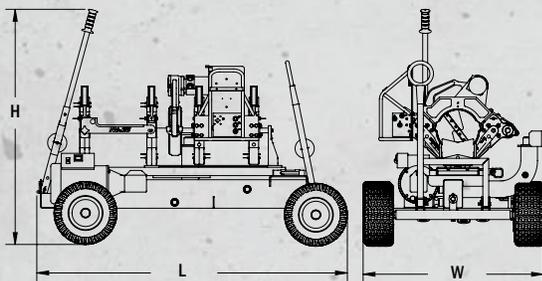

Width	38" (965mm)
Length	65.5" (1664mm)
Height	49.5" (1257mm)

SUPER TRACSTAR® 250 SPECIFICATIONS

Super TracStar 250 machine packages include fusion machine, facer, heater, insulated heater stand, 8" IPS/250mm master inserts and lifting assembly. Specifications subject to change without notice.

MODELS

Super TracStar 250	AT2500108
---------------------------	------------------

ELECTRICAL

Input Voltage Req.	None, self-contained
AC Output	120V and 240V, 60Hz, 15 Amp

ENGINE

Engine Type	20 HP liquid cooled
Fuel Type	Diesel
Fuel Tank Capacity	5 Gallons (18.92 L)
Operational Tank Cap.	8 Hours
Starting System	Electric

WEIGHT

Machine	1825 lbs (827.8 Kg)
4-Jaw Carriage	229 lbs (104 Kg)
3-Jaw Carriage	150 lbs (68 Kg)
Facer	44 lbs (20 Kg)
Heater	27 lbs (12.2 Kg)


HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)
Reservoir Capacity	8 Gallons (30.28 Liters)

CHASSIS & MOBILITY

Frame	Welded steel construction
Tracked	Rubber crawler tracks
Transportation	Self-propelled
Vehicle Speed	1.5 MPH Max
Lifting	Lift points and lifting assembly

DIMENSIONS

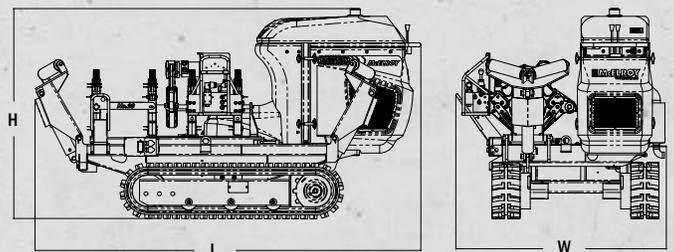

Width	53" (1346mm)
Length	97" (2464mm)
Height	53" (1346mm)

ACCESSORIES & REPLACEMENT PARTS FOR ROLLING AND TRACSTAR® 250 MACHINES

FUSION MACHINES

25' HYDRAULIC EXTENSION HOSES
Set of four 25' hydraulic extension hoses. **1219105**



HEATER CADDY
Allows the heater and heater bag to attach to a TracStar.

AT808902
RETROFIT KIT FOR MACHINES BUILT BEFORE 9/2010
AT808901



STUB END HOLDER
Self-centering stub end holder to hold stub end for butt fusion.
885001



LOW FORCE CONVERSION KIT
Converts 1500 PSI machines to 600 PSI machines. **A1280101**



HEATER PLATE KIT
Plates have an anti-stick coating and are required for butt fusion. Kit includes 2 plates and screws. **AT2501101**

FACER STAND
Facer stand provides a convenient place to protect and store your facer. **T801101**



FACER BLADE SET
Includes 4 blades, screws and wrench. **710606**

HEATER
Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars. **T2501004**



SHIPPING CONTAINER
FOR ROLLING 250 **SED00028**
FOR TRACSTAR 250 **SED01218**



SOFT-SIDED CARRY BAG
Protect, store and transport, inserts and accessories. **MJQ00543**



PYROMETER
Accurately checks surface temperatures of heater. **A218804**



LOW PROFILE ROLLERS Aids by reducing drag and protecting the pipe from damage. (Requires 2 rollers.)

CASE OF 40 **A1867501**
SINGLE ROLLER **1867501**

DATALOGGER® 5
Record and document fusion process parameters and details.

ENGLISH **DL16001**

SPANISH **DL16002**

See website for more languages



POLYHORSE® Pipe handling system that consists of adjustable racks to store and help install pipe.



1875501

WITH POWERASSIST **1875502**

POLYPORTER®
Designed to aid in lifting of the pipe as well as perform as a pipe stand. **864201**



PIPE STAND
Adjustable pipe stand to properly support, position and align pipe to be fused. **812501**



Visit www.mcelroy.com to view more fusion machines, accessories, and productivity tools.

DYNAMC® 412 EP

Butt Fusion Capability For 200mm-315mm (8"-12") Polypropylene Pipe

The **DynaMc® 412 EP** (electric pump) uses a common DynaMc EP Hydraulic Power Unit (HPU) to power a light, but rugged 2- or 4-Jaw fusion carriage. The DynaMc 412 EP is capable of fusing pipe sizes from 200mm to 315mm while maintaining a small footprint.

When space is limited, an easy-lift

cradle can be removed to make the machine even smaller and a strong electric facer can be loaded from either side of the carriage for more flexibility in tight confines.

The HPU uses a hydraulic accumulator to maintain fusion

pressures and reduce power consumption, all in an HPU that weighs 115 lbs. Capable of 400 PSI fusion pressures, the DynaMc EP is compatible with the DataLogger®.

Whether it is one fusion or 100, the DynaMc 412 EP provides the rugged reliability you expect from a McElroy.

FUSION MACHINES



LIGHTWEIGHT AND COMPACT

DynaMc machines combine the robust, patented features of standard machines into smaller units for use in tight working environments.



HYDRAULIC-POWERED

Efficient power unit provides power to fuse all day while maintaining pressures up to 400PSI.



SERRATED JAWS FOR MAXIMUM GRIP

All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



DATALOGGER® COMPATIBLE

Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

ROLLING 412


Butt Fusion Capability For 200mm-315mm (8"-12") Polypropylene Pipe

The **Rolling 412** changed the industry when introduced as the first fully self-contained fusion machine in the world.

The Rolling 412 incorporates a universal 4-jaw carriage that can be easily removed for

fusion operations remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting to a 3-jaw carriage for close access in tight installations.

For polypropylene fusions, the Rolling 412 features a powerful hydraulic facer for fast and efficient facing of pipe ends.

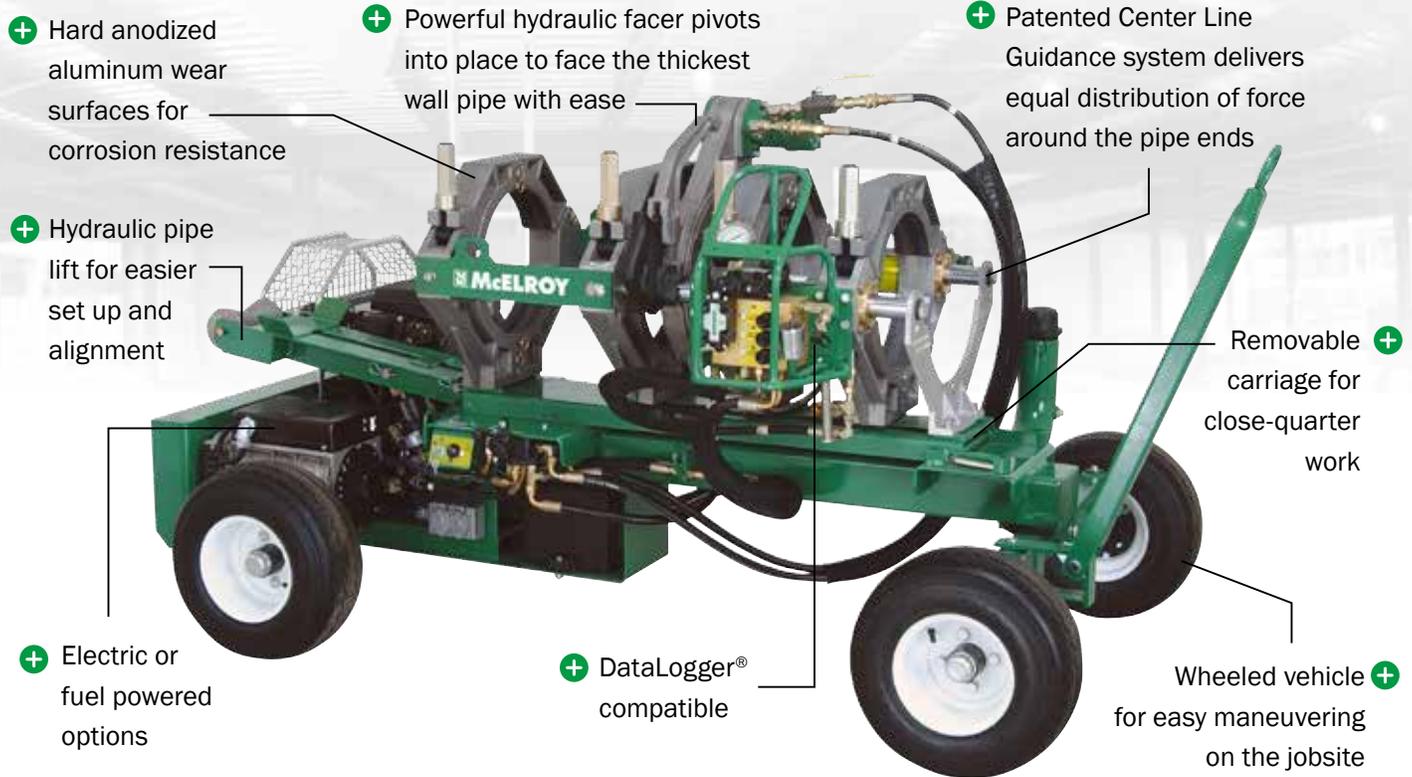

FUSION MACHINES

FEATURES

Models **A1248103** Gas-powered **A1248106** 3 Phase, Electric-powered



REMOVABLE CARRIAGE

The 412 carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



SERRATED JAWS FOR MAXIMUM GRIP

All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



AVAILABLE HYDRAULIC CLAMPING

Save time and increase productivity by eliminating manual-crank clamp knobs on 412 machines. **To purchase, add "HC" to the end of the part numbers above.**



DATALOGGER® COMPATIBLE

Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

TRACSTAR® 412

Butt Fusion Capability For 200mm-315mm (8"-12") Polypropylene Pipe

The **TracStar® 412** is designed to offer the utmost maneuverability and flexibility on a jobsite. The robust features include a strong hydraulic facer for fast and efficient facing of pipe ends. The on-board engine and generator powers both

the hydraulics and heater.

The TracStar 412 offers a self-contained, self-propelled, track-mounted vehicle that can handle grades up to 30 percent.

It also incorporates an interchangeable 4-jaw carriage that can be easily removed

for polypropylene fusion operations remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting it to a 3-jaw carriage for an even more compact fusion unit.

FUSION MACHINES



- + Powerful hydraulic facer pivots into place to face the thickest wall pipe with ease
- + Serrated hard-anodized jaws and inserts for maximum grip on pipe
- + Dual hydraulic pipe lifts for easier set up and alignment
- + Self-propelled rubber tracks with independent controls for maneuverability
- + Self-contained power eliminates the need for a separate generator
- + DataLogger® compatible
- + Removable carriage for close-quarter work

FEATURES

Model **AT1212903**



AVAILABLE HYDRAULIC CLAMPING Save time and increase productivity by eliminating manual-crank clamp knobs on 412 machines. **To purchase, add "HC" to the end of the part number above.**



SELF-PROPELLED TracStar machines are mounted on all terrain rubber tracks and easily maneuverable on any jobsite with independent controls for each track.



REMOVABLE CARRIAGE The TracStar carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



DATALOGGER® COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**




INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only. Not all inserts fit directly in the jaws. Some inserts nest inside other inserts, called master inserts.

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.

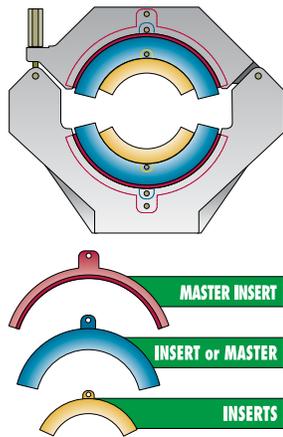

BUTT FUSION INSERTS

INSERT SIZE	PIPE OD	2-JAW SET	4-JAW SET
All inserts below fit in 12" DIPS 13.20" (335mm) jaws			
12" IPS/DIPS Master	324mm (12.75")	1203103	1203102**

All inserts below require 12" IPS/DIPS Masters

315mm	315mm (12.40")	1211206	1211202*
250mm	250mm (9.84")	1213512	1213503*
200mm	200mm (7.87")	1207045	1207009*
160mm	160mm (6.30")	1207047	1207011*


2-JAW SET = 4 INSERTS, 4-JAW SET = 8 INSERTS

* Included with DynaMc machine packages

** Included with Rolling and TracStar machine packages

11.25" MITERED INSERTS

Mitered inserts are used to fabricate segmented ells. Our standard miter is 11¼°, other mitered angles are available upon request.



INSERT SIZE	PIPE OD	PART NO.
All inserts below fit in 12" DIPS 13.20" (335mm) jaws		
12" IPS/DIPS Master	324mm (12.75")	1203102*

All inserts below fit in 8" IPS/DIPS or 8" IPS/250mm Masters

250mm x 11.25"	250mm (9.84")	1214235
200mm x 11.25"	200mm (7.87")	1214234

SET = 4 INSERTS AND 1 TEMPLATE

* Included with machine package

DYNAMC® 412 EP SPECIFICATIONS

DynaMc 412 EP machine packages include fusion machine, DynaMc EP HPU (Hydraulic Power Unit), facer, heater, insulated heater stand, facer stand, 315 Master inserts, 160mm-250mm insert sets, 160mm knife edge jaw kit and 412 stub end holder. Specifications subject to change without notice.

MODELS

DynaMc 412 EP 4-Jaw Machine Package	A1274807
DynaMc 412 EP 2-Jaw Machine Package	A1274904

POWER

Input Voltage Req.	120V, 60Hz, 1 Ph
Heater	1750 Watt
Facer	1.6 HP, 10 Amp
HPU	2.2 HP, 14 AmpV

WEIGHT

4-Jaw Machine	263 lbs (120 Kg)
2-Jaw Machine	170 lbs (77 Kg)
HPU	115 lbs (52.1 Kg)
Facer	54 lbs (24.5 Kg)
Heater	24 lbs (10.9 Kg)


HYDRAULICS

Max. Gauge Pressure	400 PSI (27.58 BAR)
----------------------------	---------------------

CHASSIS

Frame	Welded steel construction
--------------	---------------------------

DIMENSIONS

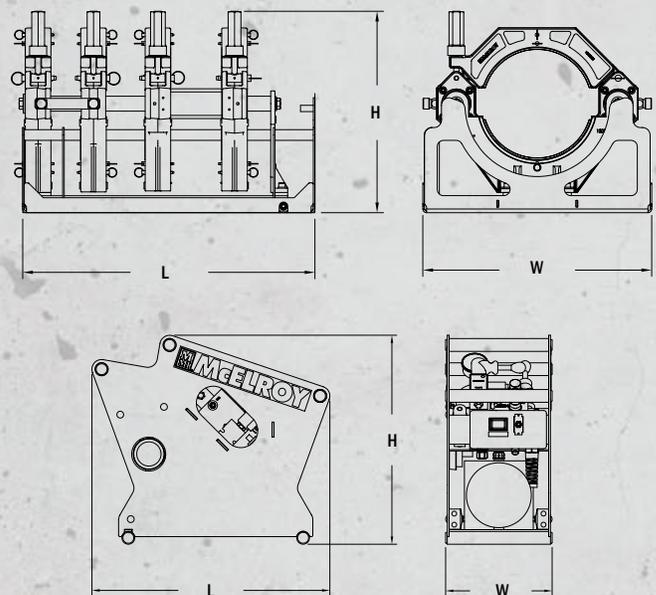

	4-Jaw Machine	2-Jaw Machine	HPU
Width	27" (686mm)	27" (686mm)	11" (279mm)
Length	34" (864mm)	27" (686mm)	24.5" (622mm)
Height	24" (610mm)	24" (610mm)	21.5" (546mm)

ROLLING 412 SPECIFICATIONS

Rolling 412 machine packages include fusion machine, facer, heater, insulated heater stand and 12" IPS/DIPS master inserts. Specifications subject to change without notice.

MODELS - **Note, to purchase Rolling machine with Hydraulic Clamping, add "HC" to the end of the part numbers below.**

Rolling 412 Electric-powered	A1248106
Rolling 412 Gas-powered	A1248103

POWER	Electric-powered	Gas-powered
Input Voltage Requirements	6.2 KVA/5.2 kW @ 220-240V, 50/60Hz, 3Ph	N/A, On-board generator
Heater	3000 Watt	3000 Watt
Facer	Hydraulic	Hydraulic
Electric Motor	3 HP	N/A


ENGINE		
Engine Type	N/A	18 HP air cooled V-Twin
Fuel Type	N/A	Gasoline
Fuel Tank Capacity	N/A	5 Gallons (18.92 L)
Operational Tank Cap.	N/A	8 Hours
Starting System	N/A	Electric

WEIGHT		
Machine	915 lbs (415 Kg)	1225 lbs (556 Kg)
4-Jaw Carriage	359 lbs (163 Kg)	359 lbs (163 Kg)
3-Jaw Carriage	261 lbs (118.4 Kg)	261 lbs (118.4 Kg)
Facer	62 lbs (28.1 Kg)	62 lbs (28.1 Kg)
Heater	24 lbs (10.9 Kg)	24 lbs (10.9 Kg)

HYDRAULICS		
Max. Gauge Pressure	800 PSI (55.16 BAR)	800 PSI (55.16 BAR)
Reservoir Capacity	6 Gallons (22.71 Liters)	8 Gallons (30.28 Liters)

CHASSIS & MOBILITY		
Frame	Welded steel construction	Welded steel construction
Tires	High-flotation inflatable	High-flotation inflatable

DIMENSIONS

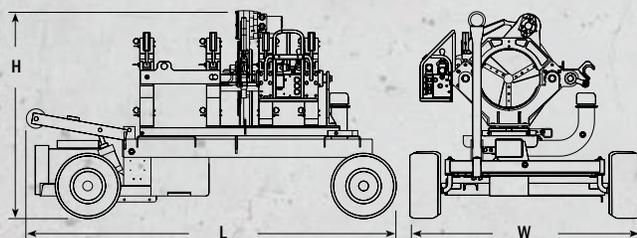

	Electric-powered	Gas-powered
Width	49" (1245mm)	49" (1245mm)
Length	85" (2159mm)	85" (2159mm)
Height	46" (1168mm)	46" (1168mm)

TRACSTAR® 412 SPECIFICATIONS

TracStar 412 machine packages include fusion machine, facer, heater, insulated heater stand, 12" IPS/DIPS master inserts and lifting assembly. Specifications subject to change without notice.

MODELS - **Note, to purchase TracStar machine with Hydraulic Clamping, add "HC" to the end of the part number below.**

TracStar 412	AT1212903
---------------------	------------------

POWER	TracStar
Heater	3000 Watt
Facer	Hydraulic


ENGINE	
Engine Type	20 HP liquid cooled
Fuel Type	Diesel
Fuel Tank Capacity	5 Gallons (18.92 L)
Operational Tank Cap.	8 Hours
Starting System	Electric

WEIGHT	
Machine	2000 lbs (907 Kg)
4-Jaw Carriage	359 lbs (163 Kg)
3-Jaw Carriage	261 lbs (118.4 Kg)
Facer	62 lbs (28.1 Kg)
Heater	24 lbs (10.9 Kg)

HYDRAULICS	
Max. Gauge Pressure	800 PSI (55.16 BAR)
Reservoir Capacity	8 Gallons (30.28 Liters)

CHASSIS & MOBILITY	
Frame	Welded steel construction
Tires	Rubber crawler tracks
Transportation	Self-propelled

DIMENSIONS

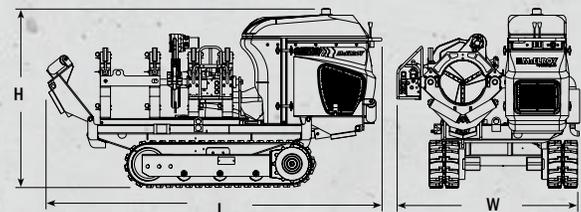

	TracStar 412
Width	53" (1346mm)
Length	97" (2464mm)
Height	53" (1346mm)

ACCESSORIES & REPLACEMENT PARTS FOR DYNAMC[®], ROLLING, AND TRACSTAR[®] 412 MACHINES

4.63" FACER BLADE SET

Includes 6 blades, screws and wrench.



STANDARD **T1208603**
 COATED **T1208603C**
 CARBIDE **T1208603T**

6.13" FACER BLADE SET

Spans the entire facer range without repositioning.



STANDARD **T1208610**
 COATED **T1208610C**



DYNAMC LOW FORCE CONVERSION KIT Converts 1500 PSI machines to 400 PSI machines.

A1280101

DATALOGGER[®] 5

Record and document fusion process parameters and details.



ENGLISH **DL16001**

SPANISH **DL16002**

See website for more languages



HEATER PLATE KIT

Plates have an anti-stick coating and are required for butt fusion. Kit includes 2 plates and screws. **A1242108**

FACER STAND

Facer stand provides a convenient place to protect and store your facer. **T1201101**



25' HEATER EXTENSION CORD
1219002

STUB END HOLDER

Self-centering stub end holder to hold stub end for butt fusion. **1270101**




HEATER

Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars. **1242112**



LOWER 3-JAW CONVERSION PACKAGE

Lower 3-jaw carriage only package to adapt existing Rolling, TracStar or Pit Bull machine components for low pressure fusions. **T1220001**



25' HYDRAULIC EXTENSION HOSES

Set of four 25' hydraulic extension hoses. **1219105**



HEATER CADDY

Allows the heater and heater bag to attach to a TracStar.

AT1818602

RETROFIT KIT FOR MACHINES BUILT BEFORE 9/2010
AT1818601



PYROMETER

Accurately checks surface temperatures of heater. **A218804**



LOW PROFILE ROLLERS

Aids by reducing drag and protecting the pipe from damage. (Requires 2 rollers.)

CASE OF 40 **A1867501**
 SINGLE ROLLER **1867501**

POLYHORSE[®] Pipe handling system that consists of adjustable racks to store and help install pipe.



1875501
 WITH POWERASSIST **1875502**

HYDRAULIC PIPE STAND

Adjustable pipe stand to properly support, position and align pipe to be fused.

AT5066701 STAND ONLY

AT5066702 WITH HYDRAULIC PIPE ADJUST

AT5066703 WITH HYDRAULIC PIPE ADJUST AND PUMP



SHIPPING CONTAINER

FOR ROLLING AND TRACSTAR 412
SED01218



PIT BULL® 618

Butt Fusion Capability For 200mm-450mm (8"-18") Polypropylene Pipe

The Pit Bull® 618 is used in special applications where wheeled or tracked 618 machines are not needed. The machine is compact, while retaining many of McElroy's popular features.

FUSION MACHINES

+ Hydraulic Power Unit (HPU) sold separately

+ Convertable to 3-jaw configuration for tight jobsites

Powerful hydraulic facer pivots into place to face the thickest wall pipe with ease

+ Microprocessor-controlled heater with anti-stick, Teflon-coated butt plates

+ Serrated hard-anodized jaws and inserts for maximum grip on pipe

DataLogger® compatible

FEATURES

Models **AT1807503** Carriage Package **T1810901** 220V HPU Package



SMALL FOOTPRINT

The Pit Bull machines are perfect for jobsites with limited space or when a Rolling or TracStar machine are unnecessary.



SERRATED JAWS FOR MAXIMUM GRIP

All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



HYDRAULIC FACER

Indexer-mounted hydraulic facer pivots into place to face the thickest wall pipe with ease.



DATALOGGER®

COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

ROLLING 618

Butt Fusion Capability For 200mm-450mm (8"-18") Polypropylene Pipe


The **Rolling 618** changed the industry when introduced as the first fully self-contained fusion machine in the world.

The Rolling 618 incorporates a universal 4-jaw carriage that can be

easily removed for fusion operations remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting to a 3-jaw carriage for close

access in tight installations.

For polypropylene fusions, the Rolling 618 features a powerful hydraulic facer for fast and efficient facing of pipe ends.

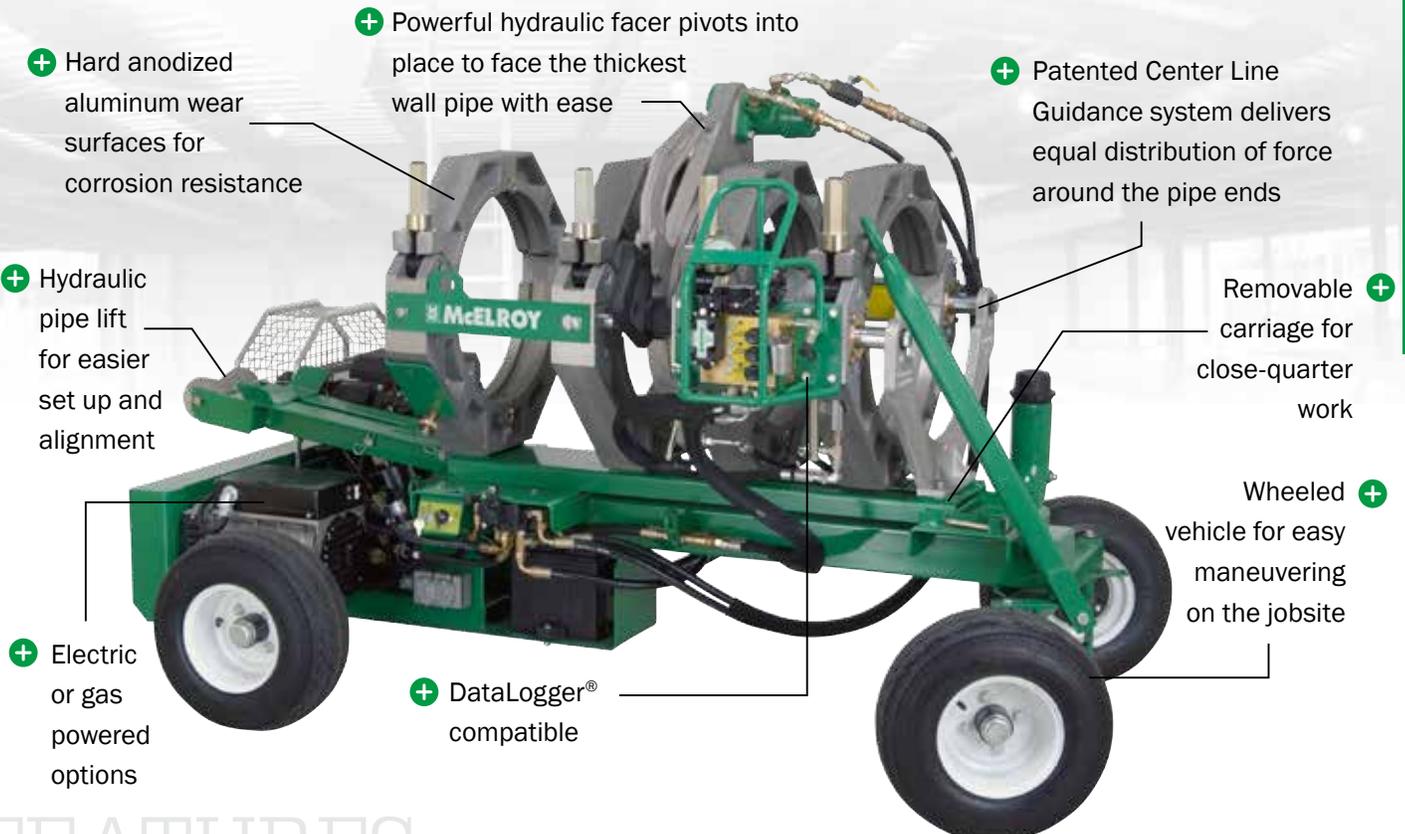

FUSION MACHINES

FEATURES

Models **A1869103** Gas-powered **A1869106** 3 Phase, Electric-powered



REMOVABLE CARRIAGE
The 618 carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



SERRATED JAWS FOR MAXIMUM GRIP
All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



AVAILABLE HYDRAULIC CLAMPING Save time and increase productivity by eliminating manual-crank clamp knobs on 618 machines. **To purchase, add "HC" to the end of the part numbers above.**



DATALOGGER® COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

TRACSTAR® 618

Butt Fusion Capability For 200mm-450mm (8"-18") Polypropylene Pipe

The **TracStar® 618** is designed to offer the utmost maneuverability and flexibility on a jobsite. The robust features include a strong hydraulic facer for fast and efficient facing of pipe ends. The on-board engine and generator powers both the hydraulics and heater.

The TracStar 618 offers a self-contained, self-propelled, track-mounted vehicle that can handle grades up to 30 percent.

It also incorporates an interchangeable 4-jaw carriage that can be easily removed for polypropylene fusion operations

remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting it to a 3-jaw carriage for an even more compact fusion unit.

FUSION MACHINES



Model **AT1807403**



AVAILABLE HYDRAULIC CLAMPING Save time and increase productivity by eliminating manual-crank clamp knobs on 618 machines. **To purchase, add "HC" to the end of the part number above.**



SELF-PROPELLED TracStar machines are mounted on all terrain rubber tracks and easily maneuverable on any jobsite with independent controls for each track.



REMOVABLE CARRIAGE The TracStar carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



DATALOGGER® COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**





INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only. Not all inserts fit directly in the jaws. Some inserts nest inside other inserts, called master inserts.

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.

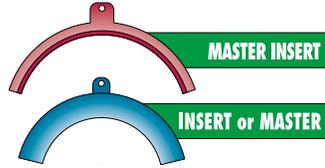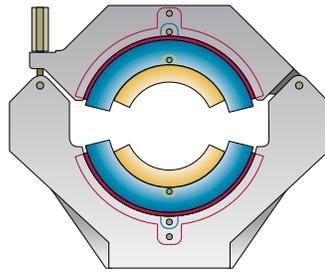

BUTT FUSION INSERTS


INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 18" OD (457mm) jaws</i>		
12" IPS Master	324mm (12.75")	2411810
450mm	450mm (17.72")	2418201
400mm	400mm (15.75")	2412111

<i>All inserts below require 12" IPS Masters</i>		
315mm	315mm (12.40")	1211202
250mm	250mm (9.84")	1213503
200mm	200mm (7.87")	1207009
160mm	160mm (6.3")	1207011

SET = 8 INSERTS

11.25" MITERED INSERTS

Mitered inserts are used to fabricate segmented ells. Our standard miter is 11¼°, other mitered angles are available upon request.



INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 18" OD (457mm) jaws</i>		
12" IPS Master	324mm (12.75")	2411810
400mm	400mm (15.75")	2420618
315mm	315mm (12.40")	2420614

<i>All inserts below fit in 12" IPS Masters</i>		
250mm x 11.25"	250mm (9.84")	1214235
200mm x 11.25"	200mm (7.87")	1214234

SET = 4 INSERTS AND 1 TEMPLATE

PIT BULL® 618 SPECIFICATIONS

Pit Bull 618 machine packages include fusion machine, facer, 12"-18" heater, and insulated heater stand. Pit Bull HPU sold separately. Specifications subject to change without notice.

MODELS

Pit Bull 618 Carriage	AT1807503
Pit Bull HPU Package	T1810901

POWER

Minimum Power Req	5.2 KVA / 4.5 kW @ 240V, 1 Ph
Heater	3000 Watt
Facer	Hydraulic
Electric Motor	5 HP

WEIGHT

4-Jaw Carriage	445 lbs (202 Kg)
3-Jaw Carriage	350 lbs (158 Kg)
HPU	390 lbs (176.9 Kg)
Facer	91 lbs (41.3 Kg)
6" - 12" Heater	28 lbs (13 Kg)
12" - 18" Heater	34 lbs (15.4 Kg)


HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)
Reservoir Capacity	10 Gallons (37 Liters)

CHASSIS & MOBILITY

Frame	Welded steel construction
Tires	High-flotation inflatable
Transportation	Two wheel cart (HPU)

DIMENSIONS

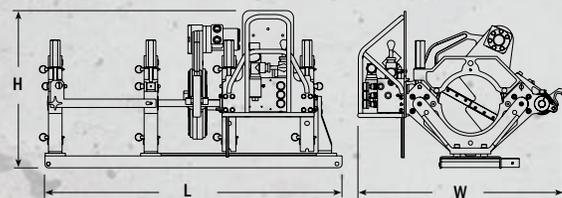

	Pit Bull 618	HPU
Width	44" (1118mm)	32.5" (826mm)
Length	44" (1118mm)	48" (1219mm)
Height	33" (838mm)	41" (1036mm)

ROLLING 618 SPECIFICATIONS

Rolling 618 machine packages include fusion machine, facer, 12"-18" heater, and insulated heater stand. Specifications subject to change without notice.

MODELS - **Note, to purchase machine with Hydraulic Clamping, add "HC" to the end of the part numbers below.**

Rolling 618 Electric	A1869106
Rolling 618 Gas	A1869103

POWER	Electric	Gas
Input Voltage Req.	6.2 KVA/5.2 kW @ 220-240V, 50/60Hz, 3Ph	N/A
Heater	3000 Watt	3000 Watt
Facer	Hydraulic	Hydraulic
Electric Motor	5 HP	N/A

ENGINE

Engine Type	N/A	18 HP Air Cooled V-Twin
Fuel Type	N/A	Gasoline
Fuel Tank Capacity	N/A	5 Gallons (18.92 L)
Operational Tank Cap.	N/A	8 Hours
Starting System	N/A	Electric

WEIGHT

Machine	1100 lbs (498 Kg)	1335 lbs (606 Kg)
4-Jaw Carriage	445 lbs (202 Kg)	445 lbs (202 Kg)
3-Jaw Carriage	350 lbs (158 Kg)	350 lbs (158 Kg)
Facer	91 lbs (41.3 Kg)	91 lbs (41.3 Kg)
6" - 12" Heater	28 lbs (13 Kg)	28 lbs (13 Kg)
12" - 18" Heater	34 lbs (15.4 Kg)	34 lbs (15.4 Kg)


HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)	800 PSI (55.16 BAR)
Reservoir Capacity	6 Gallons (22.71 Liters)	6 Gallons (22.71 Liters)

CHASSIS & MOBILITY

Frame	Welded steel construction
Tires	High-flotation inflatable

DIMENSIONS

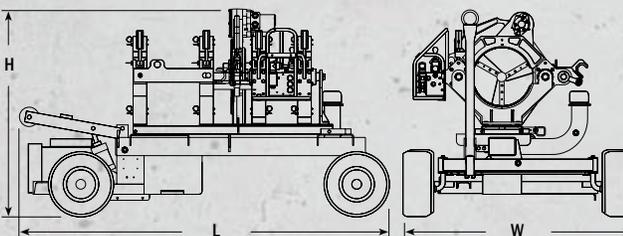

	Electric	Gas
Width	50" (1270mm)	50" (1270mm)
Length	83" (2108mm)	85" (2159mm)
Height	57" (1448mm)	57" (1448mm)

TRACSTAR® 618 SPECIFICATIONS

TracStar 618 machine packages include fusion machine, facer, 12"-18" heater, insulated heater stand and lifting assembly. Specifications subject to change without notice.

MODEL - **Note, to purchase machine with Hydraulic Clamping, add "HC" to the end of the part number below.**

TracStar 618	AT1807403
---------------------	------------------

POWER

Heater	3000 Watt
Facer	Hydraulic

ELECTRICAL

Input Voltage Req.	None, self-contained
AC Output	120V and 240V, 60Hz, 15 Amp

WEIGHT

Machine	2085 lbs (946 Kg)
4-Jaw Carriage	445 lbs (202 Kg)
3-Jaw Carriage	350 lbs (158 Kg)
Facer	91 lbs (41.3 Kg)
6" - 12" Heater	28 lbs (13 Kg)
12" - 18" Heater	34 lbs (15.4 Kg)

HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)
Reservoir Capacity	8 Gallons (30.28 Liters)


ENGINE

Engine Type	20 HP liquid cooled
Fuel Type	Diesel
Fuel Tank Capacity	5 Gallons (18.92 L)
Operational Tank Cap.	8 Hours
Starting System	Electric

CHASSIS & MOBILITY

Frame	Welded steel construction
Tracked	Rubber crawler tracks
Vehicle Speed	1.5 MPH Max

DIMENSIONS

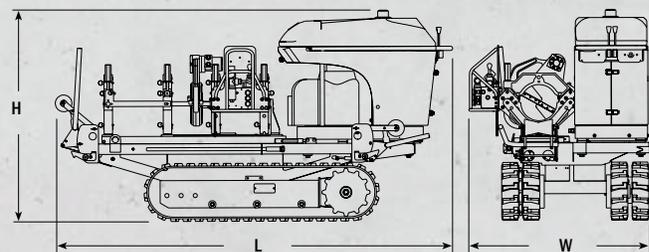

Width	57" (1448mm)
Length	97" (2464mm)
Height	53" (1346mm)

ACCESSORIES & REPLACEMENT PARTS FOR ROLLING, TRACSTAR® AND PIT BULL® 618 MACHINES

FUSION MACHINES

4.63" BLADE SET

Includes 6 blades, screws and wrench.



STANDARD	T1208603
COATED	T1208603C
CARBIDE	T1208603T

9.12" FACER BLADE SET

Spans the entire facer range without repositioning.




STANDARD	T1812602
COATED	T1812602C

LOWER 3-JAW CONVERSION PACKAGE

Lower 3-jaw carriage only package to adapt existing Rolling, TracStar or Pit Bull machine components for low pressure fusions.

T1825501




DATALOGGER® 5

Record and document fusion process parameters and details.

ENGLISH
DL16001

SPANISH
DL16002

See website for more languages



HEATER PLATE KIT Includes 2 plates and screws.

6" - 12"	A1242108
12" - 18"	A1852013

FACER STAND

Facer stand provides a convenient place to protect and store your facer.

T1801101



25' HEATER EXTENSION CORD
1219002

STUB END HOLDER

Self-centering stub end holder to hold stub end for butt fusion.

1879101



6" - 12" HEATER

Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars.

1855502

* Not included with machine package. Must be ordered separately.



SHIPPING CONTAINER

FOR ROLLING AND TRACSTAR 618
SED01218



25' HYDRAULIC EXTENSION HOSES

Set of four 25' hydraulic extension hoses. **1219105**

12" - 18" HEATER

Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars.

1852019



HEATER CADDY

Allows the heater and heater bag to attach to a TracStar.

AT1818602

RETROFIT KIT FOR MACHINES BUILT BEFORE 9/2010

AT1818601



PYROMETER

Accurately checks surface temperatures of heater. **A218804**

Visit www.mcelroy.com to view more fusion machines, accessories, and productivity tools.

HYDRAULIC PIPE STAND

Adjustable pipe stand to properly support, position and align pipe to be fused.

AT5066701 STAND ONLY

AT5066702 WITH HYDRAULIC PIPE ADJUST

AT5066703 WITH HYDRAULIC PIPE ADJUST AND PUMP



LOW PROFILE ROLLERS

Aids by reducing drag and protecting the pipe from damage. (Requires 2 rollers.)

CASE OF 40 **A1867501**
SINGLE ROLLER **1867501**

POLYHORSE® Pipe handling system that consists of adjustable racks to store and help install pipe.



1875501

WITH POWERASSIST **1875502**

PIT BULL® 500 SERIES II

Butt Fusion Capability For 315mm-500mm (12"-20") Polypropylene Pipe


McElroy's **Pit Bull® 500 Series II** is designed for special applications where a tracked vehicle is not needed. The Pit Bull 500 can fabricate segmented ells with

optional mitered inserts and is DataLogger® compatible.

The Pit Bull 500 carriage incorporates McElroy's patented Centerline Guidance

System, serrated jaws and inserts, and 3- or 4-jaw carriage flexibility.

FUSION MACHINES

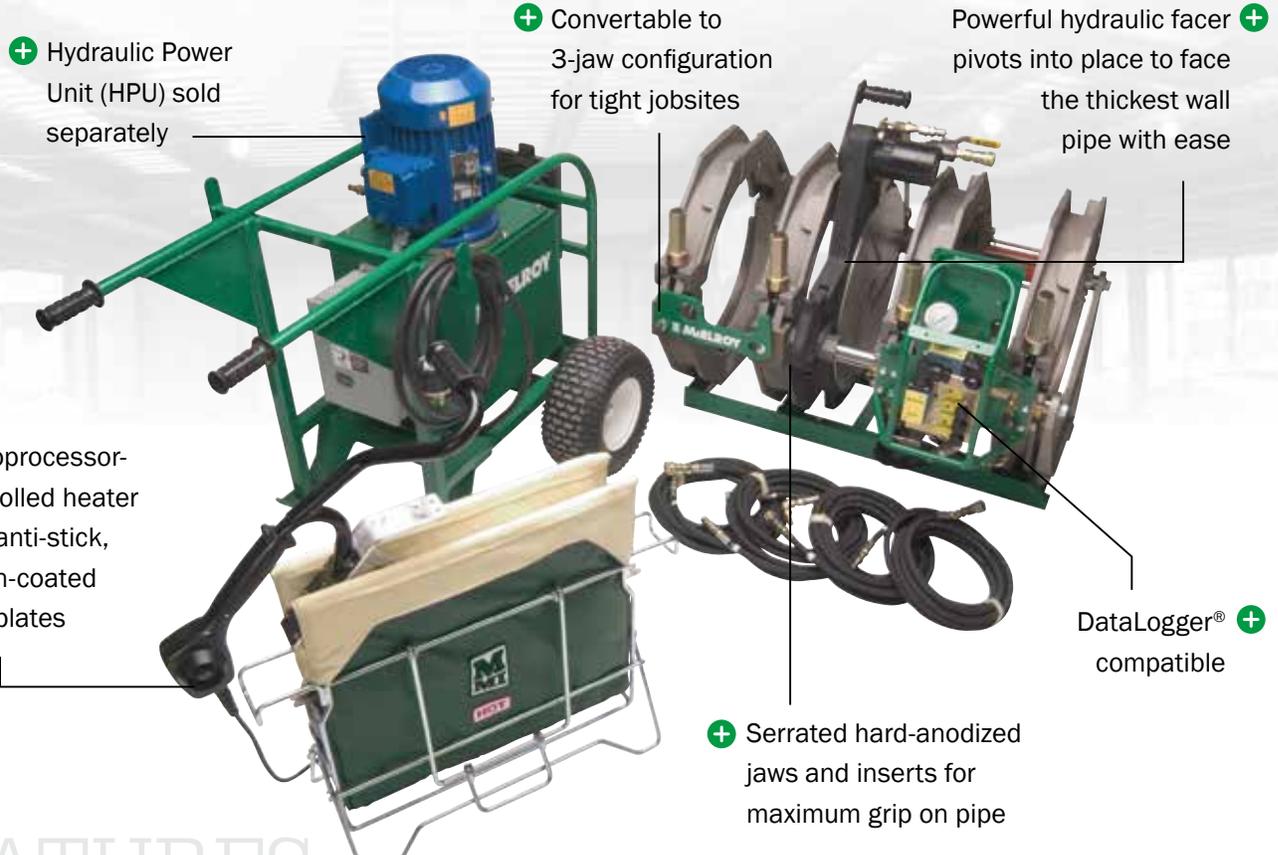

+ Hydraulic Power Unit (HPU) sold separately

+ Convertable to 3-jaw configuration for tight jobsites

Powerful hydraulic facer + pivots into place to face the thickest wall pipe with ease

+ Microprocessor-controlled heater with anti-stick, Teflon-coated butt plates

DataLogger® + compatible

+ Serrated hard-anodized jaws and inserts for maximum grip on pipe

FEATURES

Models **AT5034002** 500mm Carriage **T1810901** 240V HPU **T1810902** 220-240V HPU



SMALL FOOTPRINT

The Pit Bull machines are perfect for jobsites with limited space or when a Rolling or TracStar machine are unnecessary.



SERRATED JAWS FOR MAXIMUM GRIP

All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



HYDRAULIC FACER

Indexer-mounted hydraulic facer pivots into place to face the thickest wall pipe with ease.



DATALOGGER®

COMPATIBLE Record heater temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

TRACSTAR® 500 SERIES 3

Butt Fusion Capability For 315mm-500mm (12"-20") Polypropylene Pipe

The **TracStar® 500 Series 3** is designed to offer the utmost maneuverability and flexibility on a jobsite. The robust features include a strong hydraulic facer for fast and efficient facing of pipe ends. The on-board engine and generator powers both the hydraulics and heater.

The TracStar 500 offers a self-contained, self-propelled, track-mounted vehicle that can handle grades up to 30 percent.

The TracStar 500 incorporates a removable carriage for polypropylene fusion operations remote from the vehicle. For installations in limited space, the outer

fixed jaw and skid can be removed from the carriage, converting it to a 3-jaw carriage for an even more compact fusion unit.



FUSION MACHINES

FEATURES

Model **AT5000111** 500mm Carriage



SELF-CONTAINED

The McElroy TracStar line has self-contained power – eliminating the need for a separate generator.



SELF-PROPELLED

TracStar machines are mounted on all terrain rubber tracks and easily maneuverable on any jobsite with independent controls for each track.



REMOVABLE CARRIAGE

The TracStar carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



DATALOGGER®

COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**




INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only. Not all inserts fit directly in the jaws. Some inserts nest inside other inserts, called master inserts.

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.

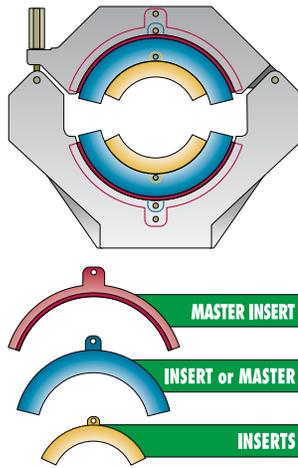

BUTT FUSION INSERTS

INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 500mm jaws</i>		
18"/500mm OD Master	457mm (18.00")	T5004206
<i>All inserts below require 18" OD Masters</i>		
450mm	450mm (17.72")	2418201
400mm	400mm (15.75")	2412111
12" IPS Master	324mm (12.75")	2411810


All inserts below require 12" IPS & 18"/500mm OD Masters

315mm	315mm (12.40")	1211202
-------	----------------	----------------

SET = 8 INSERTS

11.25" MITERED INSERTS

Mitered inserts are used to fabricate segmented ells. Our standard miter is 11¼°, other mitered angles are available upon request.



INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 500mm jaws</i>		
18"/500mm OD Master	457mm (18.00")	T5004206
<i>All inserts below require 18" OD Masters</i>		
400mm	400mm (15.75")	2420618
315mm	315mm (12.40")	2420614
12" IPS Master	324mm (12.75")	2411810

SET = 4 INSERTS AND 1 TEMPLATE

PIT BULL® 500 SERIES II & TRAC-STAR® 500 SERIES 3 SPECIFICATIONS

TracStar 500 Series 3 and Pit Bull Series II machine packages include fusion machine, facer, heater, insulated heater stand and lifting assembly. Pit Bull HPU sold separately. Specifications subject to change without notice.

MODELS

Pit Bull 500 Series II Carriage	AT5034002
Pit Bull 240V HPU Package	T1810901
Pit Bull 220 - 240V HPU Package	T1810902
TracStar 500 Series 3 (500mm Carriage)	AT5000111

POWER	Pit Bull w/HPU		TracStar
Input Volt. Req.	240V, 60Hz, 1Ph	220 - 240V, 50/60Hz, 3Ph	N/A, On-board generator
Minimum Power Req.	8.9 KVA / 8.8 kW @ 240V, 1Ph	9.2 KVA / 8.5 kW @ 220-240V, 3Ph	N/A, Self-Contained Deisel
Heater	4000 Watt	4000 Watt	5000 Watt
Facer	Hydraulic	Hydraulic	Hydraulic

ENGINE

Engine Type	Electric, 5 HP	23.5 HP, 1001cc, 3-cylinder liquid cooled
Fuel Type	N/A	Diesel
Fuel Tank Capacity	N/A	11 Gallons (41.6 L)
Operational Tank Capacity	N/A	11 Hours
Starting System	N/A	Electric

WEIGHT

Machine	N/A	3123 lbs (1417 Kg)
4-Jaw Carriage	390 lbs (176.9 Kg)	750 lbs (340.2 Kg)
3-Jaw Carriage	289 lbs (131.1 Kg)	365 lbs (165.6 Kg)
HPU	390 lbs (176.9 Kg)	N/A
Facer	84 lbs (38.1 Kg)	98 lbs (44.5 Kg)
6" - 12" Heater	28 lbs (13 Kg)	N/A
12" - 20" Heater	39 lbs (17.7 Kg)	N/A
6" - 20" Heater	N/A	63 lbs (28.6 Kg)


HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)	800 PSI (55.16 BAR)
Reservoir Capacity	10 Gallons (37 Liters)	12 Gallons (45.4 Liters)

CHASSIS & MOBILITY

Frame	Welded steel construction	Welded steel construction
Tires/Tracks	High-flotation inflatable	Rubber crawler tracks
Transportation	Two wheel cart (HPU)	Self-propelled
Vehicle Speed	N/A	Low 1.18 MPH High 2.1 MPH

DIMENSIONS

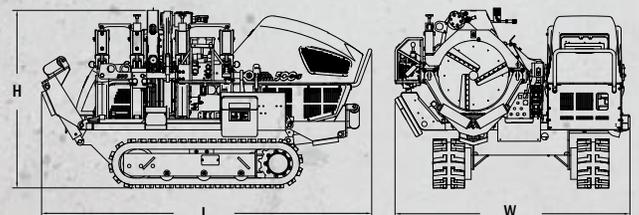


	Pit Bull	HPU	TracStar
Width	39" (991mm)	32.5" (826mm)	68" (1727mm)
Length	40" (1016mm)	48" (1219mm)	95" (2413mm)
Height	36" (914mm)	41" (1036mm)	51" (1295mm)

ACCESSORIES & REPLACEMENT PARTS FOR TRACSTAR® 500 SERIES 3 AND PIT BULL® SERIES II MACHINES


FUSION MACHINES

6" - 20" TRACSTAR HEATER
Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars. **T5048001**

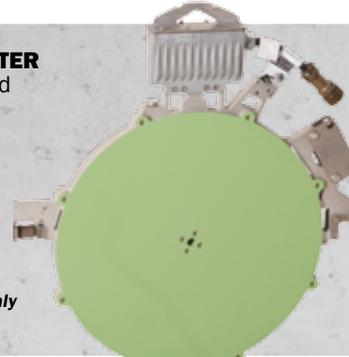

** For TracStar 500 Series 3 only*

6" - 12" PIT BULL HEATER
Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars. **T5008403**

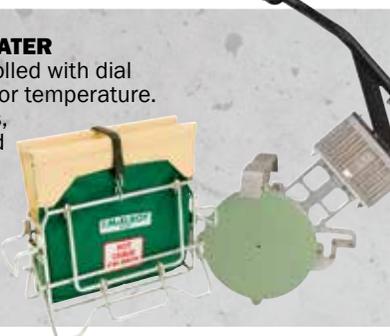

** Not included with machine package. Must be ordered separately.*

12" - 20" PIT BULL HEATER
Microprocessor-controlled with dial thermometer to monitor temperature. Includes heater plates, insulated heater stand and stripper bars. **T5008009**



FACER STAND Facer stand provides a convenient place to protect and store your facer. **T5004701**



FACER BLADE SET
Includes 6 blades, screws and wrench.

STANDARD	T5005006
COATED	T5005006C
CARBIDE	T5005007T




HOSE & EXTENSION KIT
25' facer extension hoses, carriage extension hoses, switch box and indexer extension cables. **T5002006**



25' HEATER EXTENSION CORD
1219002



HEATER PLATE KIT
Includes 2 plates and screws. **AT5048011**



For Pit Bull machines:
6" - 12" **A1242108**
12" - 20" **AT5008007**

SHIPPING CONTAINER
Protects and transports TracStar machine. **SED00500**



PYROMETER
Accurately checks surface temperatures of heater. **A218804**



STUB END HOLDER
Self-centering stub end holder to hold stub end for butt fusion. **1879101**



DATALOGGER® 5
Record and document fusion process parameters and details.

ENGLISH **DL16001**
SPANISH **DL16002**

See website for more languages



HYDRAULIC PIPE STAND
Adjustable pipe stand to properly support, position and align pipe to be fused.

AT5066701 STAND ONLY
AT5066702 WITH HYDRAULIC PIPE ADJUST
AT5066703 WITH HYDRAULIC PIPE ADJUST AND PUMP



Visit www.mcelroy.com to view more fusion machines, accessories, and productivity tools.

POLYHORSE® Pipe handling system that consists of adjustable racks to store and help install pipe.

1875501
WITH POWERASSIST **1875502**



LOW PROFILE ROLLERS Aids by reducing drag and protecting the pipe from damage. (Requires 2 rollers.)

CASE OF 40 **A1867501**
SINGLE ROLLER **1867501**



MEGAMC® ROLLERS
Aids by reducing drag and protecting the pipe from damage for large diameter pipe. **4842401**



MEGAMC[®] 824


Butt Fusion Capability For 355mm-630mm (14"-24") Polypropylene Pipe

The **MegaMc[®] 824** will butt fuse pipe sizes from 355mm to 630mm. These revolutionary machines bring the flexibility of the smaller machines to MegaMc

large-diameter fusion. It is the first fusion machine of this size specifically designed for close-quarter work with all the advantages of a track or rolling machine.

The carriage has 4 jaws with a removable 3-jaw carriage and is capable of top loading the heater and facer to maximize functionality within limited space.

FUSION MACHINES

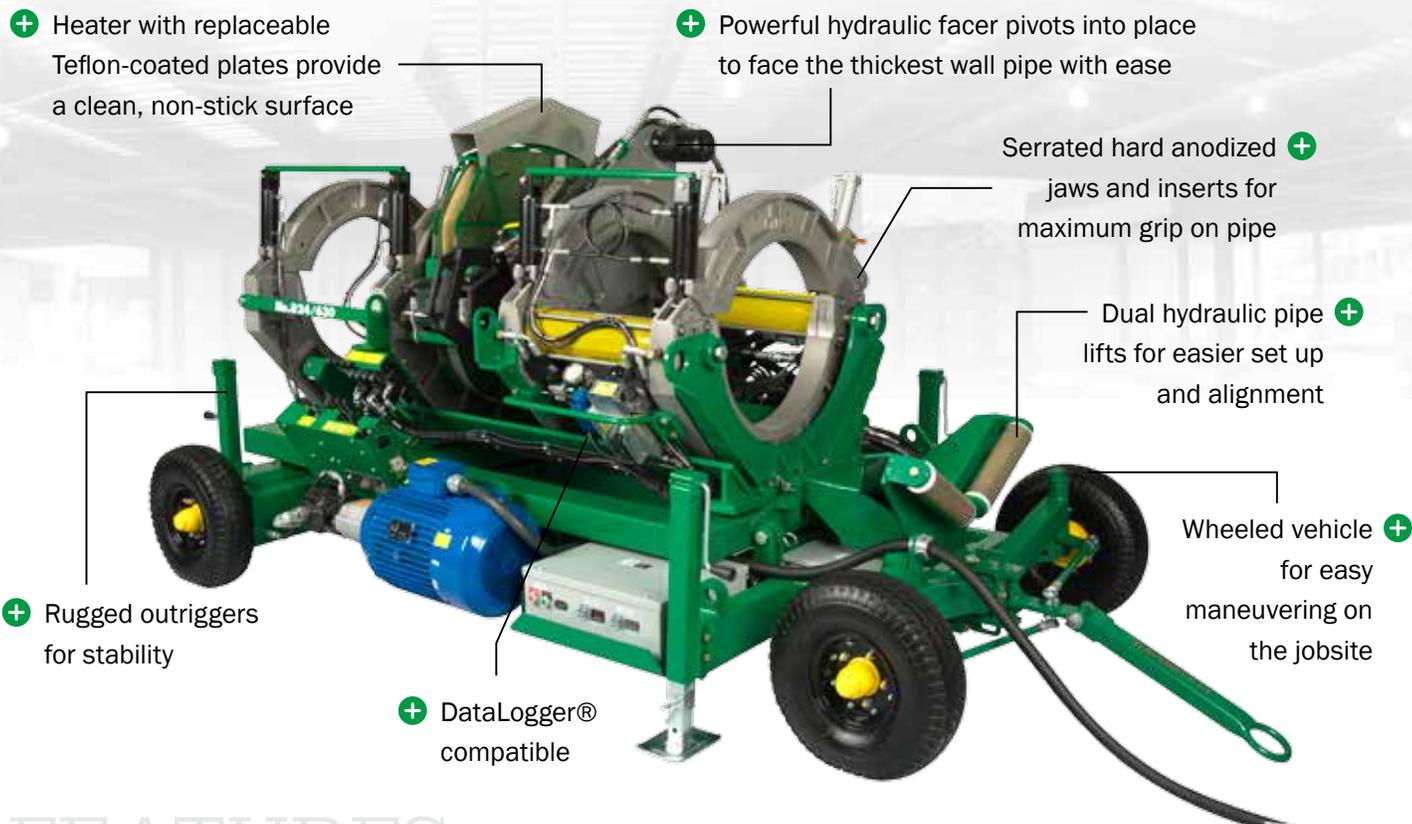

Model **A2435503**

FEATURES



REMOVABLE CARRIAGE

The 824 carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



SERRATED JAWS FOR MAXIMUM GRIP

All McElroy machine jaws and inserts feature deep serrations to provide the most secure clamping of the pipe.



A MIX OF MUSCLE AND VERSATILITY

The MegaMc 824 features hydraulically powered assists for all fusion operations, including the jaws, pipe lifts, heater and facer.



DATALOGGER[®] COMPATIBLE

Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

TRACSTAR® 630


Butt Fusion Capability For 355mm-630mm (14"-24") Polypropylene Pipe

The **TracStar® 630** offers a self-contained, self-propelled, track-mounted vehicle that can handle grades up to 30 percent. The machine can fuse polypropylene pipes and fittings from 355mm to 630mm.

The TracStar 630 incorporates an

interchangeable 4-jaw carriage that can be easily removed for polypropylene fusion operations remote from the vehicle. For installations in limited space, the outer fixed jaw and skid can be removed from the carriage, converting it to a 3-jaw carriage for an even more compact fusion unit.

The TracStar 630 is designed to offer the utmost maneuverability and flexibility on a jobsite. The robust features include a strong hydraulic facer for fast and efficient facing of pipe ends. The on-board engine and generator powers both the hydraulics and heater.

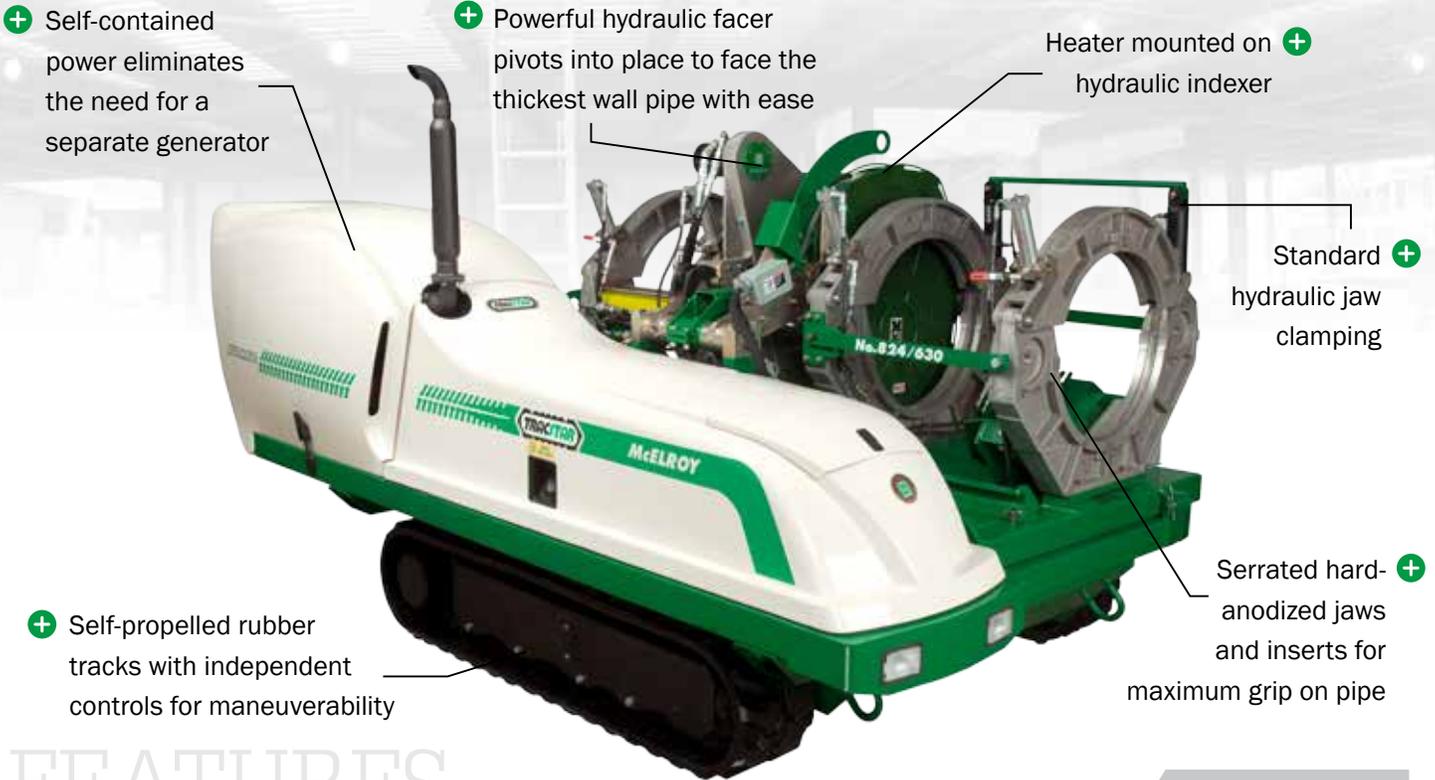

FEATURES

Model **AT2400103**



SELF-CONTAINED

The McElroy TracStar line has self-contained power – eliminating the need for a separate generator.



SELF-PROPELLED

TracStar machines are mounted on all terrain rubber tracks and easily maneuverable on any jobsite with independent controls for each track.



REMOVABLE CARRIAGE

The TracStar carriage can be easily removed for tight installations. The outer fixed jaw and skid can also be removed converting it to a 3-jaw machine for an even more compact unit.



DATALOGGER®

COMPATIBLE Record heat-er temperature and fusion pressure profiles over time in adherence to supported fusion standards. **See pg 48 for more information.**





INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

INSERTS

Our inserts have been surface-hardened for longer life. All inserts are serrated for maximum grip on the pipe. Inserts are made for one size pipe only. Not all inserts fit directly in the jaws. Some inserts nest inside other inserts, called master inserts.

Note: Other sizes of inserts are available upon request. Contact your McElroy representative about inserts to fit your needs.

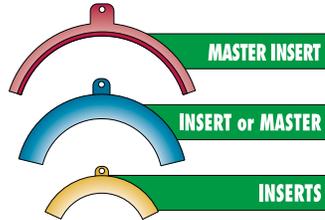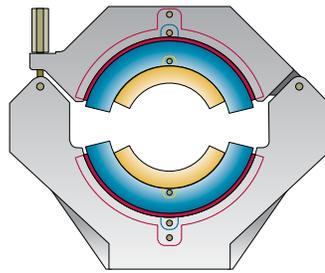

BUTT FUSION INSERTS

INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 630mm jaws</i>		
18" Master	457mm (18.00")	2411708
500mm	500mm (19.69")	2412011


All inserts below require 18" OD Masters

450mm	450mm (17.72")	2418201
400mm	400mm (15.75")	2412111
355mm	355mm (14"OD)	2412206

SET = 8 INSERTS

11.25" MITERED INSERTS

Mitered inserts are used to fabricate segmented ells. Our standard miter is 11¼°, other mitered angles are available upon request.



INSERT SIZE	PIPE OD	PART NO.
<i>All inserts below fit in 630mm jaws</i>		
18" Master	457mm (18.00")	2411708
500mm	500mm (19.69")	2412014
450mm	450mm (17.72")	1411214

All inserts below require 18" OD Masters

400mm	400mm (15.75")	2420618
355mm	355mm (14"OD)	2420617

SET = 4 INSERTS AND 1 TEMPLATE

MEGAMC® 824 AND TRACSTAR® 630 SPECIFICATIONS

MegaMc 824 and TracStar 630 machine packages include fusion machine, facer, heater and lifting assembly. Specifications subject to change without notice.

MODELS

MegaMc 824	A2435503
TracStar 630	AT2400103

POWER

	MegaMc 824	TracStar 630
Input Voltage Req.	220-240V, 50/60Hz, 3Ph	N/A
Heater	10,950 Watt	10,950 Watt
Facer	Hydraulic	Hydraulic
Electric Motor	20 HP, 3Ph, 240V	N/A

ENGINE

Engine Type	N/A	84.5 HP liquid cooled
Fuel Type	N/A	Diesel
Fuel Tank Capacity	N/A	23 Gallons (87 L)
Operational Tank Cap.	N/A	17 Hours
Starting System	N/A	Electric

WEIGHT

Machine	5905 lbs (2678Kg)	8600 lbs (3900Kg)
4-Jaw Carriage	3790 lbs (1719Kg)	3790 lbs (1719Kg)
3-Jaw Carriage	1350 lbs (612Kg)	1350 lbs (612Kg)
Facer	390 lbs (177Kg)	390 lbs (177Kg)
Heater	240 lbs (109Kg)	240 lbs (109Kg)



HYDRAULICS

Max. Gauge Pressure	800 PSI (55.16 BAR)	800 PSI (55.16 BAR)
Reservoir Capacity	28 Gallons (106 Liters)	12 Gallons (45 Liters)

CHASSIS & MOBILITY

Frame	Welded steel construction	Welded steel construction
Tires/Tracks	High-flotation inflatable	Rubber crawler tracks
Transportation	Pulled via tow ring	Self-propelled
Vehicle Speed	N/A	Low 1 MPH High 1.7 MPH

DIMENSIONS

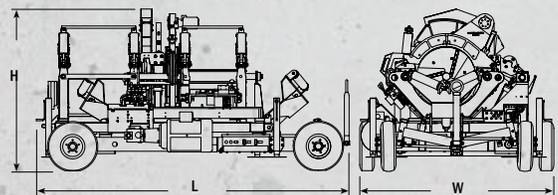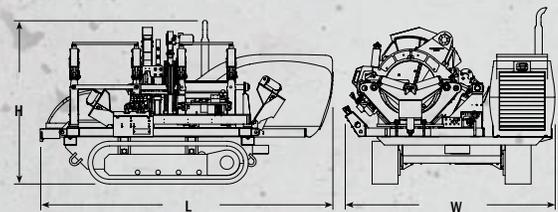

	MegaMc 824	TracStar 630
Width	83" (2108mm)	98" (2489mm)
Length	131" (3327mm)	141" (3581mm)
Height	69" (1753mm)	84" (2134mm)

ACCESSORIES & REPLACEMENT PARTS FOR MEGAMC® 824 AND TRACSTAR® 630 MACHINES

FUSION MACHINES

FACER BLADE SET
Includes 6 blades, screws and wrench.



STANDARD	3615710
COATED	3515710C
CARBIDE	3615701T

11" FACER BLADE SET
Includes 6 blades, screws and wrench.



STANDARD	3615712
COATED	3615712C

STUB END HOLDER
Holds stub end for butt fusion. **2419501**



DATALOGGER® 5
Record and document fusion process parameters and details.

ENGLISH **DL16001**

SPANISH **DL16002**

See website for more languages



EXTENSION KIT
40' hydraulic extension hoses and cable. **T2408301**



HEATER PLATE KIT Plates have an anti-stick coating and are required for butt fusion. Kit includes 2 plates and screws. **A2428506**



HEATER/FACER STAND
Recommended for tight installations where top loading necessary. **T2409101**



MEGAMC® POLYHORSE®
Pipe-handling system for 500mm to 1,200mm pipe. **4834001**




MEGAMC® ROLLERS Aids by reducing drag and protecting the pipe from damage for large diameter pipe. **4842401**

MEGAMC® PIPE STAND
Powered pipe stand with lateral and vertical movement.

GAS **3645001**

DIESEL **3645002**

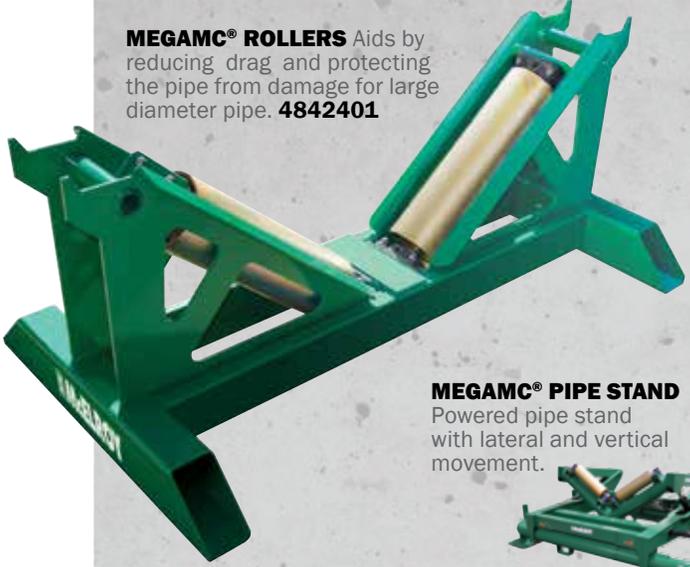


PIPE SUPPORT STAND
Adjustable pipe stand to properly support, position and align pipe to be fused.

MEGAMC 824 **2429101**

TRACSTAR 630 **T9017401**



PYROMETER
Accurately checks surface temperatures of heater. **A218804**



PIPE HANDLING

Pipe Handling Accessories For 90mm to 500mm Pipe

The McElroy **PolyHorse**® is a pipe-handling system that consists of a series of adjustable racks to store and help install pipe on the jobsite. For use with polypropylene pipe sizes from 90mm to 500mm, the PolyHorse can reduce labor expenses by providing an efficient, less hazardous work environment for handling pipe bundles and enhance jobsite productivity.


Pipe is off-loaded from the delivery truck directly onto the PolyHorse, off the ground and out of the way until needed. For even more productivity, the PolyHorse can be ordered with the special PowerAssist attachment. The PolyHorse with PowerAssist features a hydraulically powered roller placed closest to the fusion machine that helps load pipe up, down and into the fusion machine.

The PolyHorse can be used with McElroy Acrobat™, Pit Bull 26, 250, 412, 618 and 500 fusion machines for more productive jobsites.

The **PolyPorter**® can lift 63mm - 250mm pipe. Created from the mind of a pipeline contractor, it is an innovative workhorse that tackles the job of handling pipe in the field. The PolyPorter combines the mechanical advantage of a dolly with the functionality of a pipe stand, to create one of the most useful pipeline tools.


One person can easily load a length of pipe without strain, the pipe can then be slid easily through the roller-equipped hook arm into the fusion machine. The jack enables the operator to raise and lower the PolyPorter to level the pipe in uneven terrain to the height of the machine.

ACCESSORIES

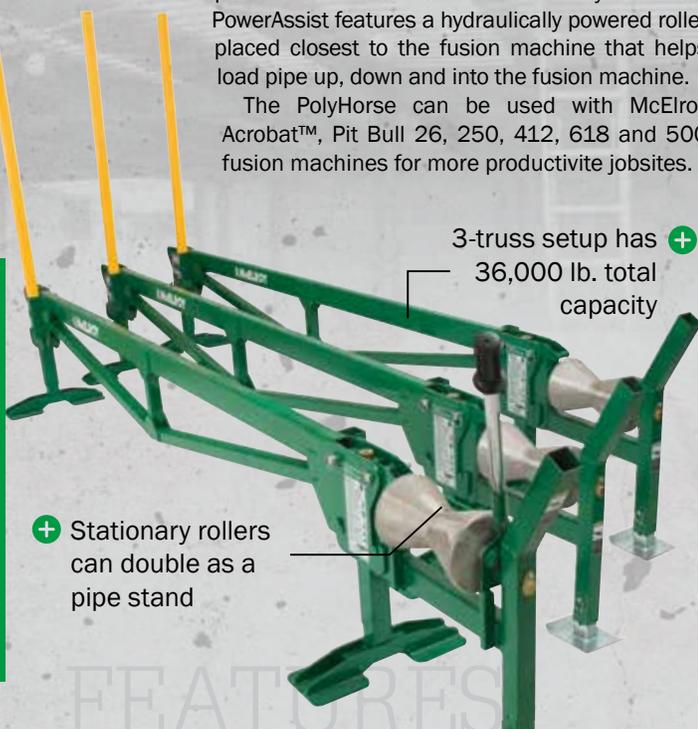

3-truss setup has +
36,000 lb. total capacity

+ Stationary rollers can double as a pipe stand

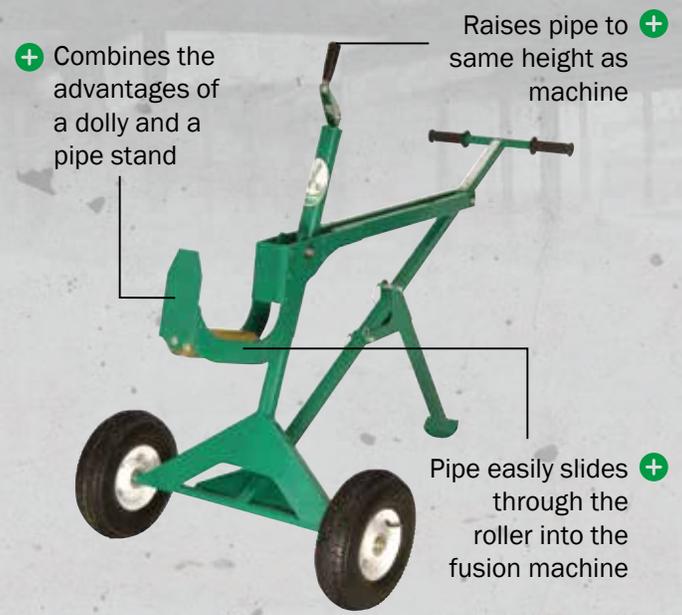

+ Combines the advantages of a dolly and a pipe stand

Raises pipe to +
same height as machine

Pipe easily slides +
through the roller into the fusion machine

Models **1875501** **1875502 WITH POWERASSIST**

Model **864201**



ENHANCES PRODUCTIVITY BY 150%
The PolyHorse racks hold pipe when its delivered and allow the pipe to be maneuvered and loaded by one operator.



MODULAR, QUICK SETUP
The PolyHorse can be tailored to your jobsite needs — eliminating machinery or manpower needed to lift and load pipe in the fusion machine.



INCREASE PRODUCTIVITY
The PolyPorter allows one operator to maneuver a stick of pipe into the fusion machine at the proper height.



WORK SMARTER
By simply tipping the PolyPorter towards the ground, one operator can scoop up the length of pipe — reducing strain on operators.




INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

ACCESSORIES

Pipe stands save wear and tear on machinery, reduce strain on operators and make the fusion process easier. Pipe stands are adjustable for uneven terrain so that the pipe is supported at the same height as the machine. By bringing the pipe in parallel to the machine it is much easier to adjust hi/low and achieve a square face-off. When building a pipeline, pipe stands can greatly increase productivity. Instead of moving the machine for each joint, you would pull the fused pipe through the machine and roll in a new stick to be fused. This allows you to stage all the pipe in one location, and keep the fusion machine stationary, minimizing down time between fusion joints.

The **Low Profile Rollers** are to be used with 100mm - 450mm pipe. McElroy's rollers allow you to pull a string of thermoplastic pipe around a curve and over considerable distances. Pipe, and even the fusion joints, slide easily through the rollers and off the ground, keeping the pipe clean and increasing productivity. Easily paired with the PolyHorse® and other McElroy products, the Low Profile Rollers are versatile, handy, and essential for projects that need high-performance pipe rollers to improve workflow.

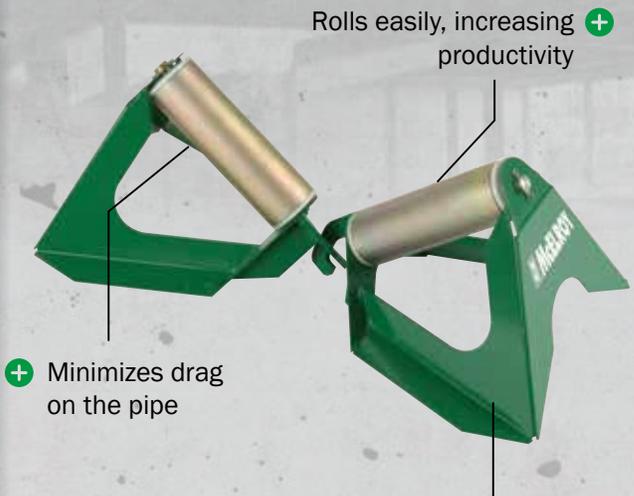

Models 160-250 MACHINES
812501

412-500 MACHINES
AT5066701 MANUAL PIPE STAND
AT5066702 PIPE STAND PACKAGE WITH HEIGHT ADJUSTMENT
AT5066703 PIPE STAND PACKAGE WITH HEIGHT ADJUSTMENT AND PUMP PACKAGE

NOTE: 2 Rollers equal one pair. Rollers should be ordered in multiples of 2.

Keeps pipe clean and off the ground

Models **A1867501** CASE **1867501** SINGLE ROLLER

ACCESSORIES



SAVE WEAR AND TEAR ON EQUIPMENT McElroy pipe stands are adjustable for uneven terrain so that pipe is supported at the same height as the fusion machine.



INCREASE PRODUCTIVITY Instead of moving the machine for each joint, pipe stands allow the fused pipe to be pulled through the machine while rolling a new stick in to place.



MINIMIZES PIPE DAMAGE Low Profile Rollers are strong, tip resistant and designed for use with pipe from 100mm to 450mm in diameter – with a maximum load of 2,500 lbs.



COMPACT STORAGE IN REUSABLE CRATE Each case of Low Profile Rollers, containing 40 rollers, fits in the bed of a standard pick-up truck.



INDUSTRY-LEADING WARRANTY McElroy leads the industry by standing by our products. We warrant all products manufactured, sold and repaired by it to be free from defects in materials and workmanship for 5 years. (See website for details.)

DATALOGGER® 5

Fusion Joint Verification and Documentation

The McElroy **DataLogger® 5** is used to record and document key parameters of the fusion process to determine if a joint was fused with correct pressure and times according to supported standards.

The DataLogger 5 generates joint reports for in-field review or transfer to the DataLogger Vault™, a free online application that provides secure storage and unparalleled joint data analysis capabilities.

The DataLogger 5 features GPS stamping for a more accurate location of the fusion joint, a 2D scanner that records barcode information from pipes and fittings, and full support for wireless networks.

ACCESSORIES



DataLogger

FEATURES

Models **DL16001** ENGLISH **DL16002** SPANISH **DL16003** PORTUGUESE **DL16004** RUSSIAN **DL16005** CHINESE



FUSIONGUIDE™ VISUAL GRAPH INTERPRETATION
Quickly interpret graphic representations of key parameters of the pipe fusion process such as heat and cool times and fusion pressures.



GPS TAGGING
Tag multiple locations for each fusion joint such as the point of fusion and the eventual burial location.



5MP CAMERA
Enhance your DataLogger joint reports by including photos of fusion joints, jobsite conditions, face-off and more.



DATALOGGER VAULT™ COMPATIBLE
Securely store, sort and analyze fusion joint records from all your jobsites in one central location.

DATA LOGGER® VAULT™

Collect, Store and Analyze Fusion Joint Data in the Cloud


The **DataLogger Vault** is a secure server available on the internet to store fusion joint data from not only the

DataLogger 5 but also previous models such as the DataLogger 3 and 4. This new offering will allow users to store

their fusion joint data and have access to a variety of analytical tools.

+ Quickly sort and tag joint records by machine, joint, operator, device or job

+ Securely store joint records from all jobsites

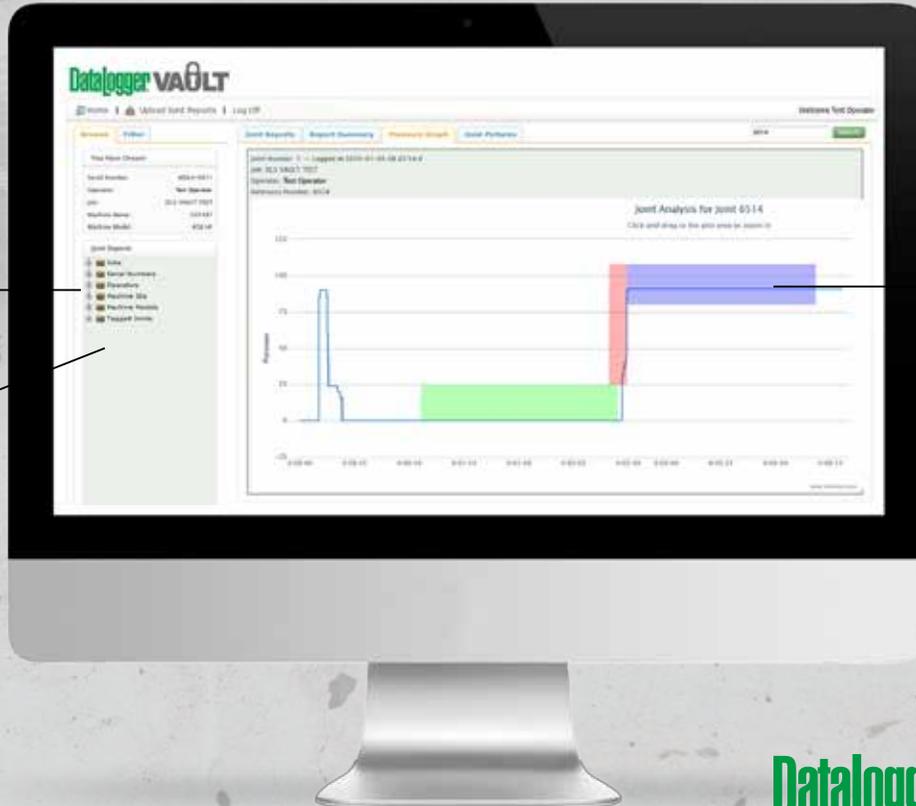

+ Visually analyze completed fusion joints

DataLogger VAULT

ACCESSORIES

FEATURES



SECURE STORAGE

Data uploaded to the DataLogger Vault is hosted on secured servers that are actively monitored, maintained, and backed up. Technical details regarding data security are available upon request.



ACCESSIBLE

ANYWHERE DataLogger Vault data is available securely online, and accessible from almost any Internet-connected device with a web browser. An operator in one location can upload data which can be immediately reviewed by an inspector or another person in a separate location.




AUTOMATED GROUPING

When joint data is uploaded to the Vault, it's automatically grouped by serial number, machine ID, machine model, operator ID, and job ID. This makes it easy to review a set of joint data even though it may have come from different DataLoggers or operators.



COMPATIBLE WITH DATA LOGGER 3, 4 AND 5

The DataLogger Vault allows users to store, review, and analyze fusion joint data from McElroy DataLogger models 3, 4, and 5 in one secure, central location.

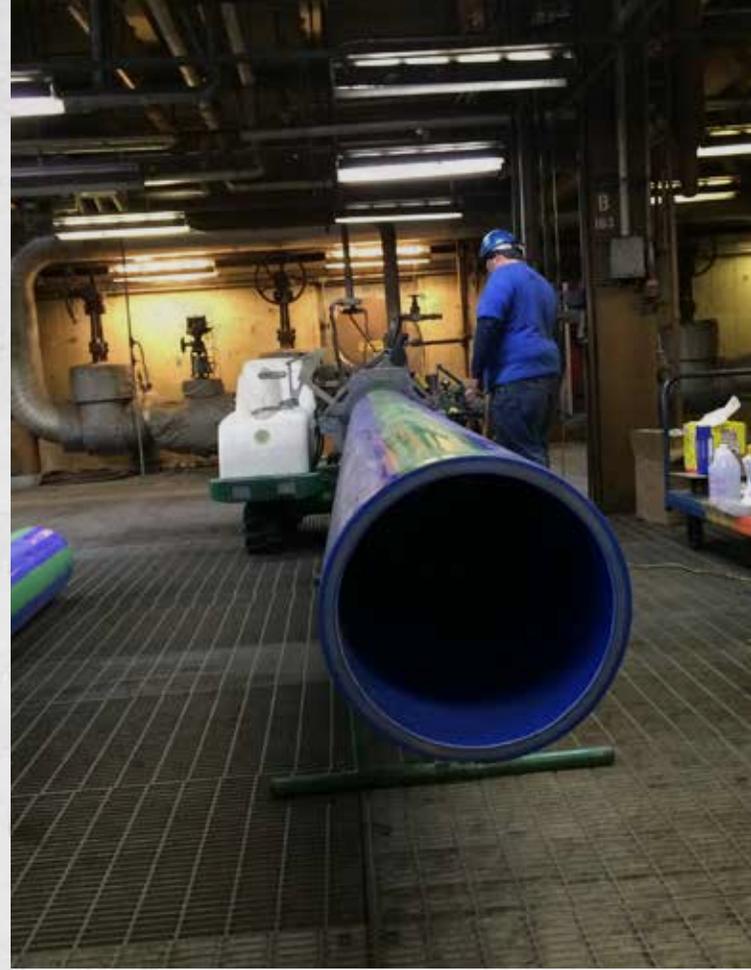

**THE
LEADER
IN THERMOPLASTIC
PIPE
FUSION
MACHINES & ACCESSORIES**



**P.O. BOX 580550 TULSA, OK 74158-0550 U.S.A.
918-831-9229 WWW.MCELROY.COM**

Copyright © 2016 McElroy Manufacturing, Inc. Catalog No. PPCTLG201601. Printed in the U.S.A.